## DECLARATION FOR THE RECORD OF DECISION

#### SITE NAME AND LOCATION

Kimberton Superfund Site Village of Kimberton, Chester County, Pennsylvania

## Statement of Purpose

This decision document presents the selected remedial action for the Kimberton Superfund Site (Site) developed in accordance with the Comprehensive Environmental Response, Compensation and Liability Act of 1980, as amended by the Superfund Amendments and Reauthorization Act of 1986 (CERCLA), 42 U.S.C. Section 9601 et seq., and to the extent practicable, the National Contingency Plan (NCP), 40 C.F.R. Part 300.

#### Statement of Basis

This decision is based upon and documented in the contents of the Administrative Record. The attached index identifies the items which comprise the Administrative Record. The Commonwealth of Pennsylvania has reviewed, commented and concurred on this Record of Decision.

# Description of the Selected Remedy

The remedial alternative presented in this document is the first operable unit of a permanent remedy for the Kimberton Site. It will provide a reliable interim solution for the prevention of health risks to area residents associated with exposure to contaminated groundwater. The alternative selected requires continued monitoring and treatment of contaminated wells on an individual basis. Treatment will consist of filtration utilizing granular activated carbon adsorption. Potentially threatened wells will also continue to be monitored and provided treatment if appropriate. The contaminant plume and source or sources of contamination will be addressed in a subsequent Record of Decision.

#### Declaration

The selected remedy is protective of human health and environment, attains Federal and State requirements that are applicable or relevant and appropriate, and is cost-effective as set forth in Section 121(d) of CERCLA, 42 U.S.C. Section 9621(d). This remedy satisfies the statutory preferences as set forth in Section 121(b) of CERCLA, 42 U.S.C. Section 9621(b), for remedies that employ treatment that reduce toxicity, mobility or volume as a principal element. Finally, it is determined that this remedy utilizes permanent solutions and alternative treatment technologies to the maximum extent practicable.

This is an interim remedy and will be reevaluated once the full extent of the groundwater contamination has been defined and the source remediation alternatives have been evaluated.

9-31-88

Stanley L. Łaskowski (3RAØØ)
Acting Regional Administrator

# Table of Contents for Decision Summary

SECTIO	<u>r</u>	PAGE
ı.	INTRODUCTION	1
II.	SITE NAME, LOCATION AND DESCRIPTION	
III.	SITE HISTORY	. 2
ĮV.	ENFORCEMENT HISTORY	3
v.	SITE CHARACTERISTICS	.3
	A. GEOLOGY/HYDROLOGY. B. EXTENT OF CONTAMINATION. C. SUMMARY OF SITE RISKS.	7
VI.	COMMUNITY RELATIONS HISTORY	.12
VII.	REMEDIAL ALTERNATIVE OBJECTIVES	.12
VIII.	DESCRIPTION OF REMEDIAL ALTERNATIVES	.12
IX.	DESCRIPTION OF ARARS	.14
. X.	COMPARATIVE ANALYSIS OF ALTERNATIVES	.15
XI.	DOCUMENTATION OF SIGNIFICANT CHANGES	.16
XII.	SELECTED REMEDIAL ALTERNATIVE	.16
	A. EVALUATION CRITERIA.  B. DETERMINATION OF PREFERRED REMEDIAL ALTERNATIVE.  C. STATEMENT OF FINDINGS REGARDING WETLANDS  AND FLOODPLAINS.	. 17
XIII.	STATUTORY DETERMINATIONS	.18
•	APPENDIX A SUMMARY OF ANALYTICAL DATA	
	ADDENDTY B RESPONSTUENESS SUMMARY	

### I. Introduction


The Village of Kimberton is located in the northeastern portion of Chester County, Pennsylvania near the Philadelphia metropolitan area (Figure 1). Numerous domestic and commercial potable well water supplies have been sampled by the Chester County Health Department and analyzed by the Pennsylvania Department of Environmental Resources (PADER) since January 1982. High levels of chlorinated hydrocarbon chemical contamination has been detected in many of the sampled wells. A source of this contamination has been identified as the property currently owned by the Monsey Corporation which contained several buried lagoons that were operated by the CIBA-GEIGY Corporation during the 1950's. This site was evaluated through the Hazard Ranking System (HRS) and subsequently placed on the National Priorities List (NPL), a list of hazardous waste sites targeted for action under the Superfund program, in 1982.

Three of these lagoons have been excavated with contaminated soils being removed off-site. The lagoons are in close proximity to numerous private water supply wells and less than one mile from French Creek which is used for public recreation and fishing. CIBA-GEIGY sampled 67 residential and commercial establishments in August 1, 1985 and found in some of these wells various concentrations of trichloroethylene (TCE), 1,2-dichloroethylene (DCE) and vinyl chloride (VC) which are all considered hazardous substances according to the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA). CIBA-GEIGY and Monsey signed a Consent Order and Agreement with PADER to provide certain residential and commercial locations with an alternative source of drinking and contact water in December 1986. Ciba Geigy and Monsey, in addition, continue to monitor these and other designated locations periodically according to prescribed sampling and analytical procedures outlined under the terms of the Consent Order. This is a PRPfunded, State-lead enforcement Site.

#### II. Site Name, Location, and Description

The Kimberton Site (Figure 2) encompasses the Monsey Products Company property, and adjacent properties within the surrounding village of Kimberton and the area-wide groundwater contamination. The Monsey Products Company property is located within the northeast section of Chester County, on the U.S.G.S. Phoenixville 7.5 minute quadrangle at approximately 75 Degree 34' 39" longitude 49 Degree 97' 3" latitude. The Site is geographically located within the eastern portion of a triangle formed by PA Route 113 (to the South), Coldstream Road (to the east) and Hares Hill Road (to the north and west). The town of Kimberton is centrally located at the cross roads of Hares Hill Road and Old Kimberton Road, less than 9.2 miles from the Monsey Products Company property.

Local physiography is characterized by rolling countryside generally comprised of small hills and valleys. Site area surface water drains toward French Creek, which generally flows from west to east approximately 0.75 miles to the north of the site. The ultimate regional

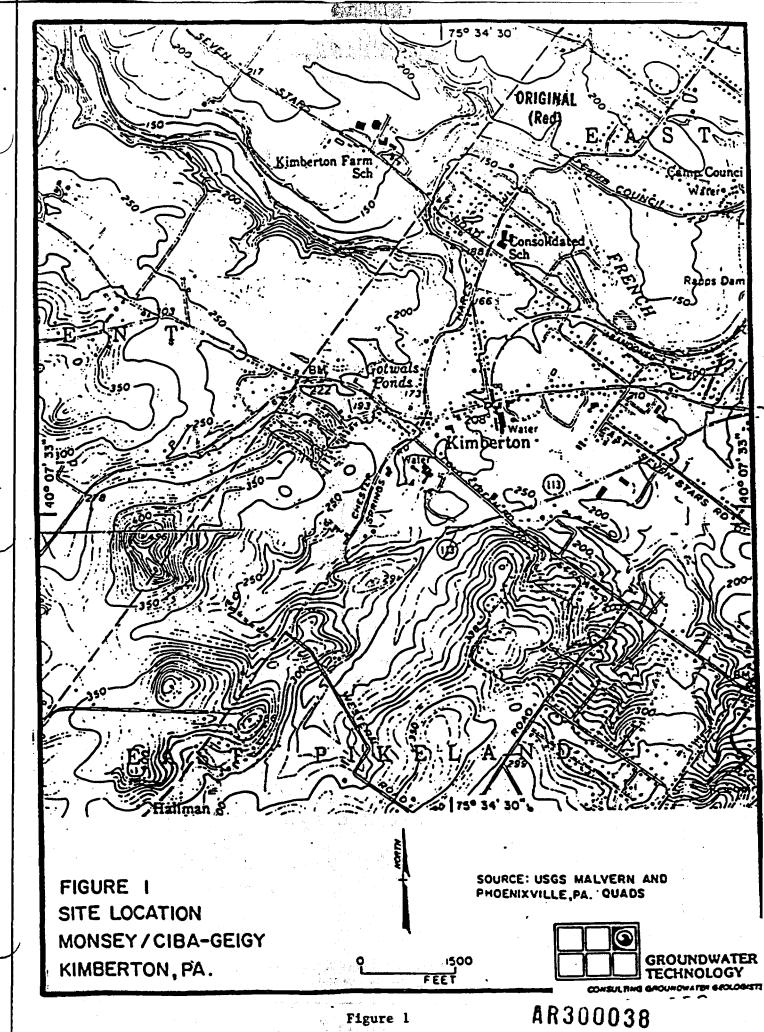

The ERM Group. pproximate Area of Investigation Scale in Feet Approximate Boundary of Kimberton NPL Site 1000 Source: USGS 7.5 Minute Topographic Quadrangles,
Phoenixville and Malvern, PA

drainage basin, of which French Creek is a tributary, is the Schuylkill River located approximately 3.5 miles to the northeast.

The Kimberton site is underlain by graphitic gneiss to the southwest and clastic sedimentary rocks (shales, sandstones, and siltstones) to the northeast.

Local hydrogeology primarily consists of a water table aquifer discharging into local surface streams at topographic lows through a system of springs and seeps. The groundwater movement through deeper, bedrock zones appears to occur primarily through secondary porosity (fractures and bedding plane partings).

## III. Site History

The property known as the Kimberton site appears as parcel #194 on the Chester County Tax map shown in Figure 3. The property is currently owned by Monsey Products Company, Inc. and was purchased by Monsey in 1968 from Firmenich Incorporated.


The title search indicates that three companies have held title to the property presently known as the Kimberton site:

- Ciba Products Corporation
- Firmenich Incorporated
- Monsey Products Company, Inc.

Corporate research on these three companies indicates that they are all involved in industrial production. Ciba Products Corporation (now CIBA-GEIGY Corporation) produces pharmaceuticals, contact lenses, herbicides and fungicides, and seeds. Firmenich Incorporated is involved in the production of chemicals and synthetic perfumes an Monsey Products Company, Inc. produces asphalt, coal tar roofing, driveway sealer and automotive undercoatings.

During the period of site ownership by a predecessor of CIBA-GEIGY (Ciba Products Company) from 1947 to 1959, a series of eight lagoons were operated on site. These lagoons, which received various residues from the manufacturing operations at that time, were ultimately abandoned and closed. Several of these lagoons were subsequently backfilled or otherwise regraded.

Volatile organic compounds were first detected in the groundwater at Kimberton during routine water quality testing of a private well on the Monsey property by Chester County Health Department (CCDH) in August 1981. Subsequent testing of 24 additional local wells by PADER in January through March of 1982 detected levels of a number of volatile organic compounds in twelve of the wells sampled.

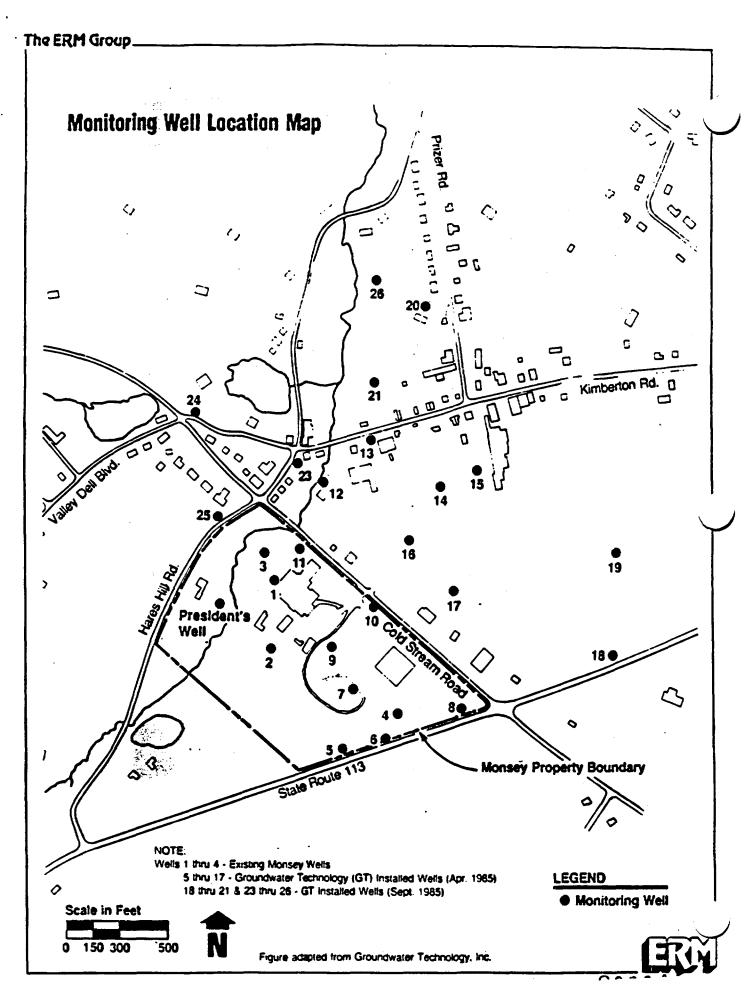

In response to the reported groundwater contamination in the Borough of Kimberton, EPA conducted a field investigation of local groundwater, surface water, and soil contamination in the Spring of 1982. This investigation reported the presence of organic chemicals, including trichloroethylene (TCE) and trans-1,2-dichloroethylene (DCE), in local groundwater, surface water, and soils sampled at or near the site. As a result of the field investigation team's (FIT) report of 23 July 1982, the Monsey site was placed on the NPL by the EPA.

Investigations conducted by CIBA-GEIGY and Monsey since the initial detection of organic compounds in water and soil samples have indicated a gradual release of volatile organic compounds through the subsurface to the local ground water table. These compounds gradually migrate with local groundwater and discharge to surface waters to the north and east in the Village of Kimberton. Volatile organic compounds have been detected in a number of private wells in an apparent downgradient direction from the Monsey property. Limited, low level surface water contamination has also been detected in local receptor streams.

## IV. Enforcement History


Past disposal practices involving hazardous substances, which occurred between 1947 and 1959, have resulted in groundwater and soil contamination at this site. In September 1986, PADER, which is the enforcement lead for this site, sent CIBA-GEIGY and Monsey letters informing these companies that they were potentially responsible parties (PRPs) and liable for the contamination at this site. In addition, these letters sought their participation in the Remedial Investigation and Feasibility Studies (RI/FS) process. Both companies agreed to conduct an RI/FS at this Site, to provide an alternate source of drinking and contact water to those residential and commercial locations whose water supply was impacted by the Site and to continue to monitor specified locations for the identified contaminants by entering into Consent Order and Agreements with PADER in 1986 and 1987.

#### V. Site Characteristics

# A. Geology/Hydrogeology

# 1. Site Geology

Locally, in Kimberton, two predominant formations exist: A graphitic gneiss which is a metamorphic rock of Precambrian age described as a medium grained gneiss and schist characterized by the presence of graphite. The other, the Stockton Formation, is a sedimentary unit of Triassic age and consists of locally of grey and red siltstones, red shales, fine to medium grey and reddish grey sandstones and arkosic sandstones (Figure 4). The shales and siltstones are sometimes thinly interbedded with impure carbonate rock. The contact zone between the graphitic gneiss and the Stockton Formation lies to the northeast of Coldstream Road and in an approximate WNW to ESE orientation. It is, for the most part, ill-defined and has been mapped using drilling logs of the site monitoring wells. As determined through drilling of the monitoring wells, the graphitic gneiss has undergone significant mechanical and chemical breakdown (weathering).

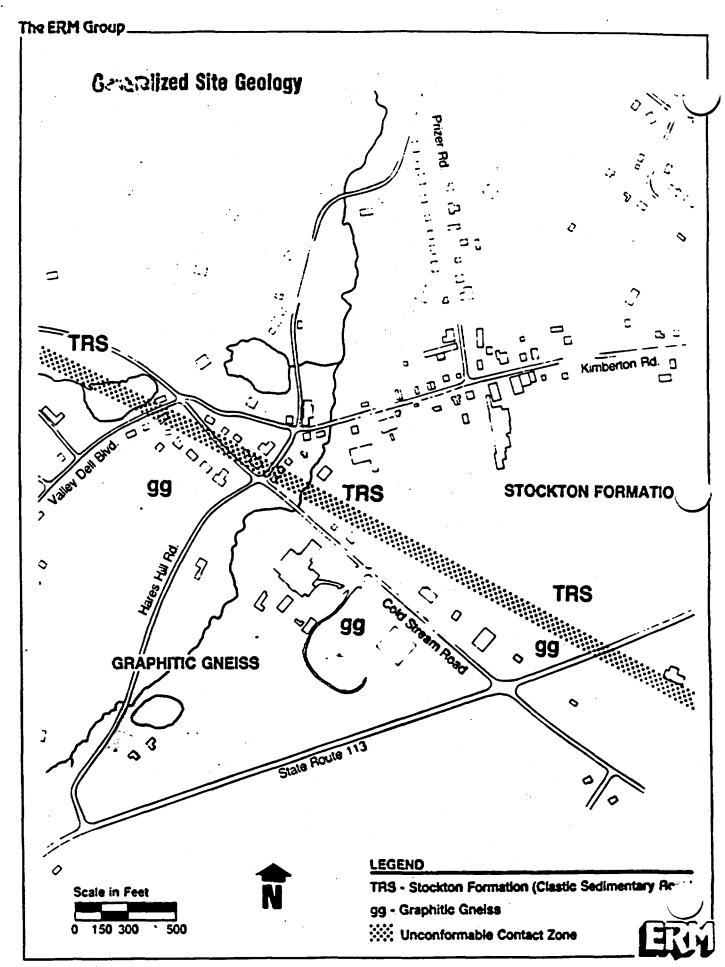

These processes have worked progressively downward from the surface generally creating an upper unconsolidated weathered zone of decomposed rock and soil which grades vertically into a crumbly, gravel-like material where pieces of sand to boulder-size rocks remain in place in a clayey matrix. The weathered zone was found to be between 50 feet and 75 feet in thickness except in one area where it was only 30 feet thick. Groundwater was noted to occur almost exclusively within the weathered portion of the graphitic gneiss (locally on the Monsey Products Company property).


Weathering within the Stockton Formation was far less severe with the weathered layer generally ranging in thickness from 5 feet to 15 feet (Figure 5).


## 2. <u>Hydrogeology</u>

The hydrogeology of the Kimberton area is typical of the Chester County region as a whole. Water levels fluctuate in response to seasonal precipitation and evaporotranspirational trends. The water table closely mimics topography with the dominant recharge areas lying in the higher elevations and discharge zones noted through local springs and streams at low elevations.

Within the area of concern, water table conditions exist within two contrasting (lithogically derived) water-bearing units: The metamorphic graphitic gneiss (encompassing the Monsey Products Company property) and the Stockton Formation (comprising the downtown Kimberton area and surrounding properties). As discussed previously, the graphitic gneiss is highly weathered to a median depth of 50 feet to 75 feet. The unconsolidated upper part of the graphitic gneiss generally has moderate to low permeability, but contains a considerable amount of water in storage. Below the unconsolidated zone the rock is generally solid; however, some minerals are heavily weathered, particularly along fractures. Permeability and storage capacity of the solid fractured rock generally decrease with depth as the degree of weathering decreases. The highest permeability probably occurs where the unconsolidated and solid rock merge. In this transitional area, openings in rock are formed or enlarged by the weathering process. Storage capacity, however, is low because the rock has limited porosity.

Groundwater movement through the gneiss will tend to migrate in response to elevational changes in the water table (Figure 6). The subsurface zone of primary movement is noted within the highly weathered and fractured upper portion of the gneiss. Deeper water-bearing zones are reported to occur at fracture traces (dominantly vertical to subvertical in profile), and generally receive recharge via vertical infiltration from the overlying horizons. Local well yields within the graphitic gneiss range from 4 - 25 gpm in wells which draw water from the weathered zone, with over 200 gpm reported in several of the deeper wells (existing Monsey wells # 1-4) which may penetrate deeper fractures within the bedrock gneiss.

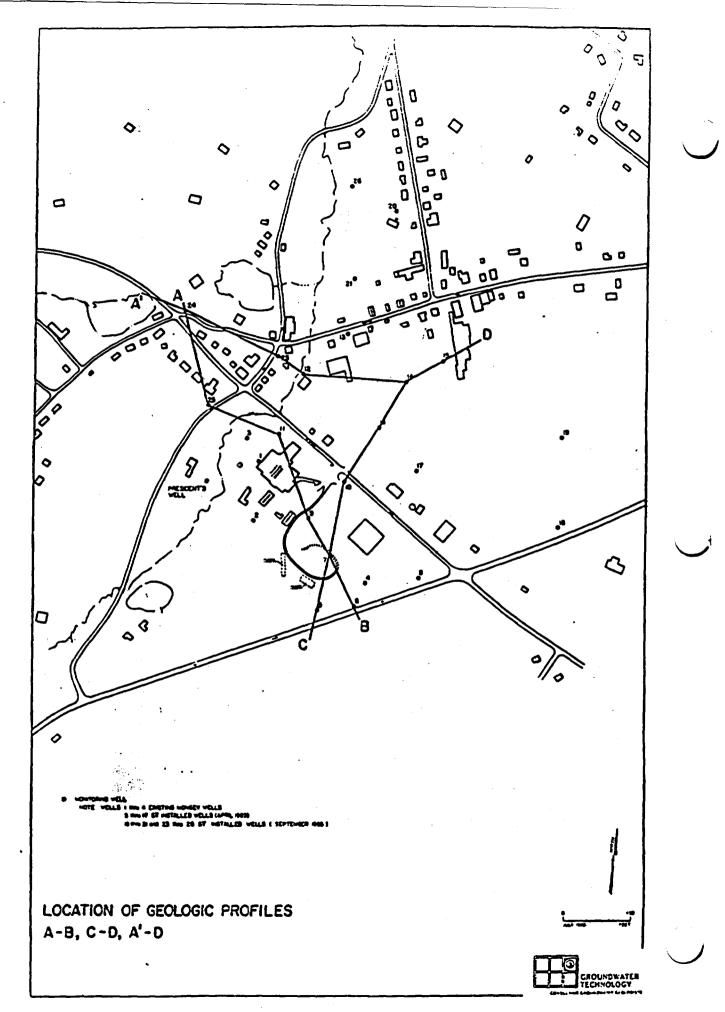

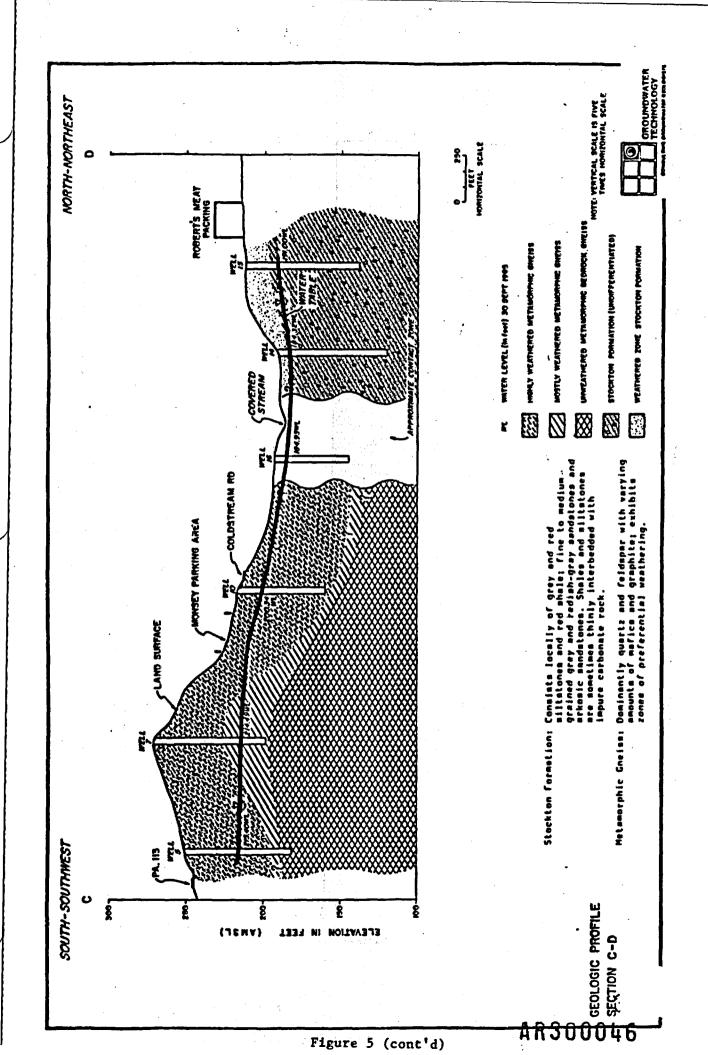

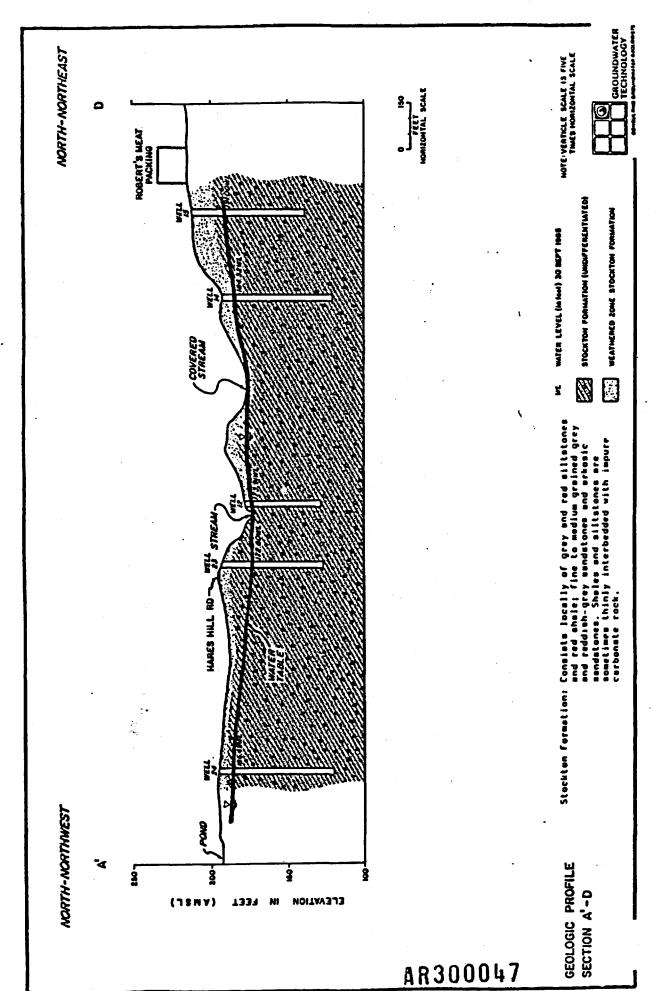


Figure 5 (cont'd)


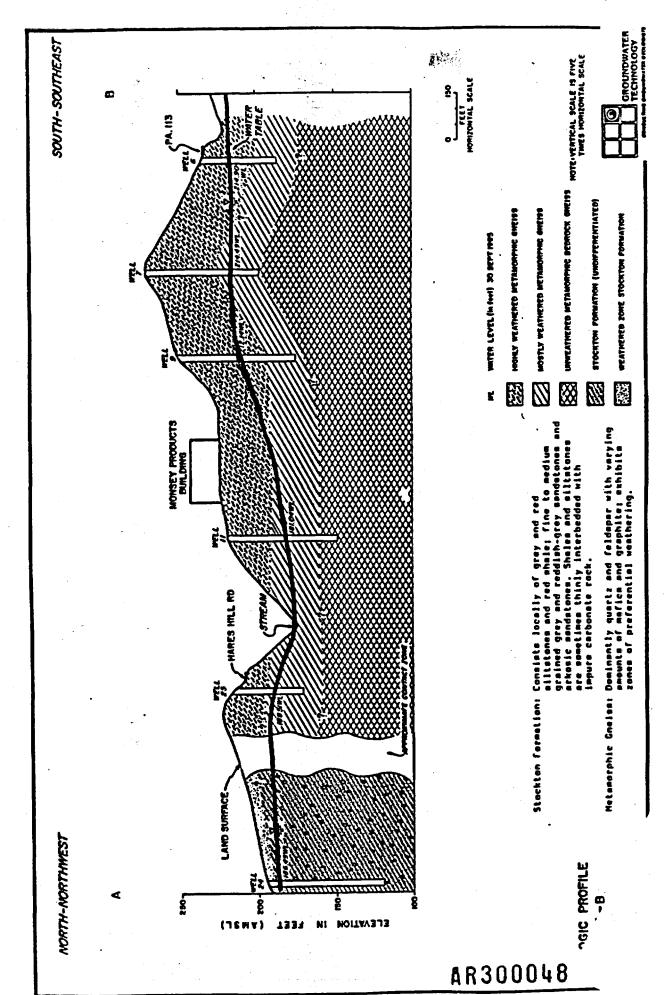


Figure 5 (cont'd)

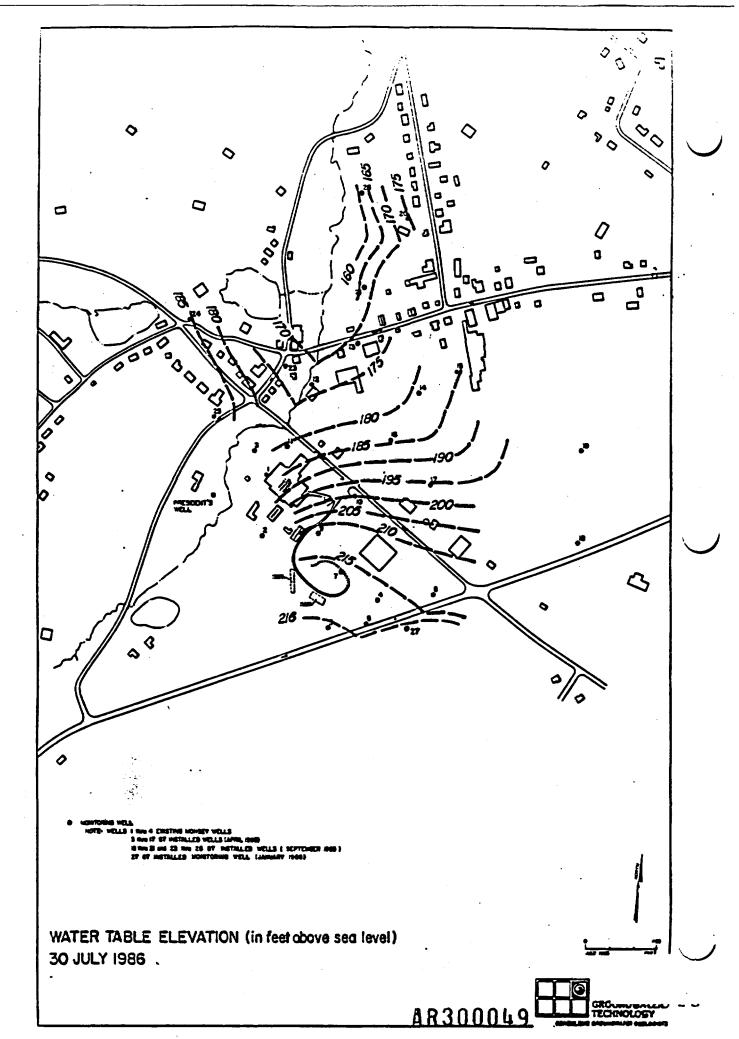


The deeper fracture zones have site specific significance due to the potential for increased water transmission. Hydraulic communication within upper weathered zones of the graphitic gneiss is likely. Associated groundwater gradient/movement is considered to be directionally controlled through water gradient elevational changes (as observed within monitoring wells and inferred through regional interpretations of groundwater movement). Specifically, groundwater movement locally within the graphitic gneiss and suspect fracture zones are regionally interpreted in a north-north easterly direction from the Monsey property and downtown Kimberton area, toward French Creek.

The Stockton Formation generally consists of interbedded sandstones, siltstones, and shales. The interbedding and fracturing has caused extremely anisotropic and heterogeneous hydraulic characteristics associated with this formation. Groundwater is largely transmitted along bedding planes, fractures and joints. Water withdrawal rates noted for wells locally penetrating the Stockton have yielded between 2 and 20 gpm, depending upon the nature, location and depth of wells.

#### a. Groundwater Movement

Groundwater elevations of both on-site (Monsey Products Company property) and off-site monitoring wells were measured from the top of secure casings using electrical water level detectors (Figure 7). Field surveys were performed to accurately determine the horizontal coordinates and vertical elevations (tied into U.S.G.S. bench mark datum located in downtown Kimberton) of well casings. Respective field data transposed onto prepared base maps provided a basis for the following interpretive correlations relative to groundwater movement within the Monsey Products Company property and adjacent Kimberton area:

- The occurance of groundwater is under water table conditions at depths ranging from approximately 2 feet to 50 feet below land surface.
- Water table elevations mimic a subdued version of surface topography; increased groundwater elevations correlating to areas of high topographic elevations such as ridges and knolls; reduced groundwater elevations occurring dominantly in topographic low areas characterized by streams, creeks, and/or springs.
- Local groundwater recharge of significance to the Monsey property and adjacent Kimberton area occurs from both vertical infiltration onto related surface areas and directionally from adjacent topographic high areas; dominantly from the south of route 113, from the north of Hares Hill Road, and from the east of downtown Kimberton (up topographic gradient from the easterly direction of the unnamed creek/marsh area).

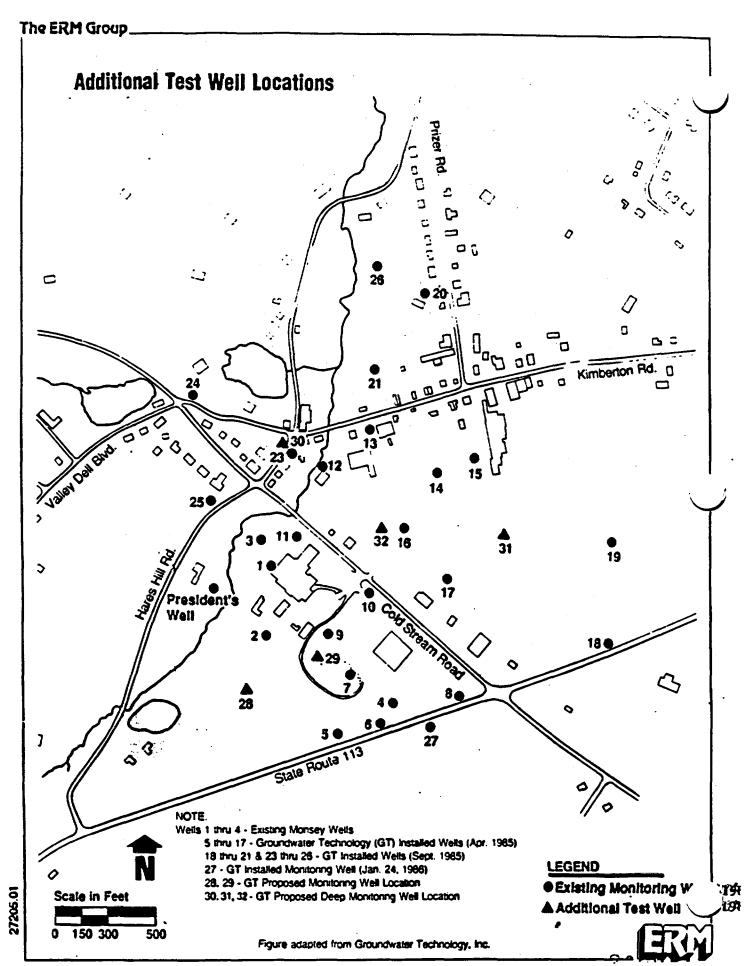

- Groundwater discharge locally occurs through surface springs, seeps, and creeks to small streams located within local topographic lows. One such discharge area is located adjacent to the northwest boundary of Monsey's property as an unnamed creek flowing to the northeast through the center of Kimberton (Stream "A"; Figure 8). Another such discharge area exists to the northeast of Monsey property as a minor unnamed creek flowing to the northwest and eventually converging with Stream "A" (Stream "B"; Figure 8). A third local groundwater discharge occurs to the southeast of Monsey property, again as an unnamed minor creek in this case flowing generally southeast from the site area (Stream "C"; Figure 8).
- Groundwater gradient and ground water flow are directionally controlled in response to elevational changes in the water table. Under natural, non-pumping conditions, the predominant ground water gradient from the Monsey property ranges directionally from the northwest clockwise through the southeast, toward the above noted ground water discharge zones.
- Physiochemical parameters measured from area monitoring wells as baseline water quality characteristics (pH, TDS, and chloride) appear to fall within background ranges.

## b. Surface Water

The local surface waters can be divided into three unnamed streams (Figure 8) emanating within and/or flowing through the central Kimberton area. For clarity, the streams have been designated as follows:

- Stream A: A small, permanent stream (the primary stream in the center of Kimberton) flowing generally south to north adjacent to the northwestern boundary of Monsey property. This stream is primarily spring fed west of the site from sources at and upstream of the gneiss/clastic contact zone. Estimated average stream flow in this area ranges seasonally from 0.5 to 4 cubic feet per second (cfs). A significant increase in stream volume occurs upon its confluence with the outfall from Gotwals Ponds. Estimated flow downstream of this confluence ranges from 8 to 12 cfs.
- Stream B: An apparent minor intermittent stream which appears to originate from a spring proximal to the 1950 location of the Kimberton town dump. The terminus of this stream is not visible on aerial photographs but it is believed to become confluent with Stream A. Estimated flow down the headwaters is 0.1 to 0.5 cfs. Downstream flow has not been observed, but is not anticipated to be significant.
- Stream C: A tributary of French Creek which flows south of the intersection of Route 113 and Cold Stream Road. This stream derives a major volume of its flow from topographically high areas to the south of the study area. Stream flow appears to be intermittant upstream of Cold Stream Road. However, a significant increase in stream flow results from a major spring located roughly 300 feet downstream of Cold Stream Road with flows estimated at 0.5 to 2 cfs.

#### B. Extent of Contamination

#### 1. Drum Removal

In mid 1982, the PRPs supervised the excavation and removal of fifty-seven 55-gallon drums from an abandoned, on-site septic system formerly used to serve the plant's wastewater needs. These drums contained offspecification asphaltic materials which had been used as partial backfill for the collapsed septic pit sometime earlier. The drum removal program, conducted in conjunction with DER, consisted of removal of all drums from the pit area, procurement of samples from five representative drums for analysis, procurement of post-excavation soil samples for analysis, and appraisal of possible relationship of groundwater contamination to the drum burial.

The drum excavation, removal, and disposal program was successfully completed in November 1982. Soil samples procured beneath the excavation floor indicated no extensive migration of organic compounds from the area.

The preliminary hydrogeologic assessment conducted by the PRPs recommended a more definitive off-site investigation of the ground-water regime surrounding the site. This is currently being completed.


## 2. Lagoon Excavation


As a result of soil sampling conducted during preliminary site assessment activities, three areas were identified within Monsey property with relatively high levels of organic compound contamination. Study of available historic aerial photographs confirmed that the three areas were former treatment lagoons. These three areas, identified by Groundwater Technologies, Inc. (GTI) as Lagoons 6, 7, and 9 were characterized by materials of similar chemical composition and physical appearance (Figure 9).

Upon review of this information and at the request of PADER, a program was undertaken by the PRPs to excavate, remove, and dispose of soils from these three former lagoon areas as part of a site remedial action program.

The excavation program was finalized during August and early September 1984. Actual site excavation was initiated on September 17 and completed on September 25. Site backfilling and restoration were completed on October 8.

Upon completion of the excavation program on September 25, 1984, a total of 143 truckloads of contaminated soil had been excavated from the site representing approximately 2,050 cubic yards of material. All excavated materials were confirmed as received at the licensed TSD facility operated by CECOS International, Inc. in Niagara Falls, New York.

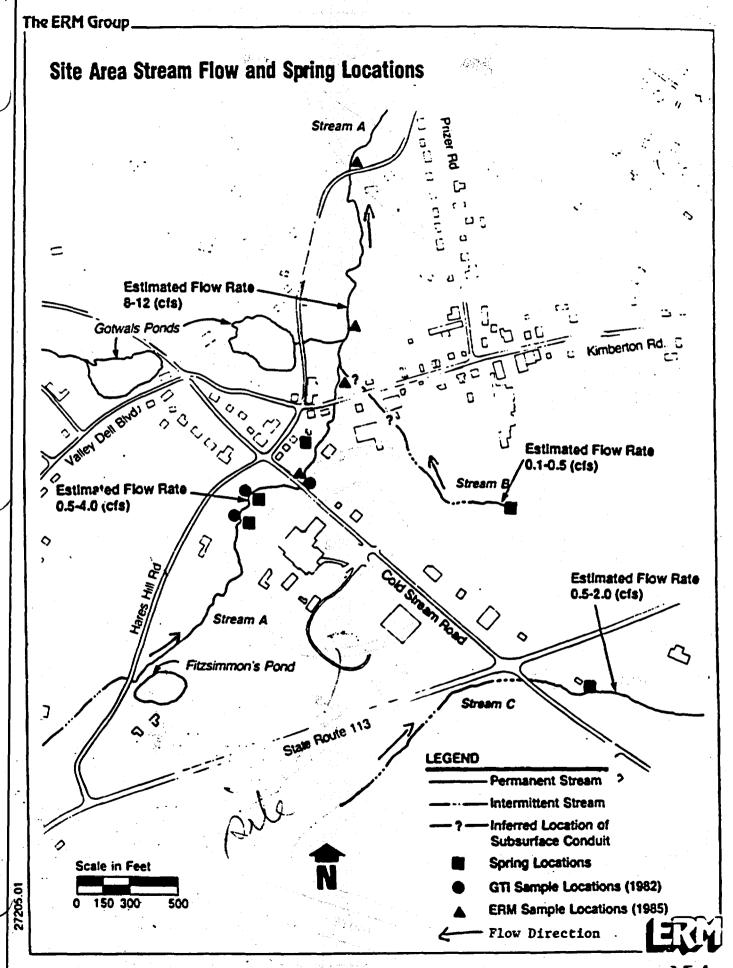

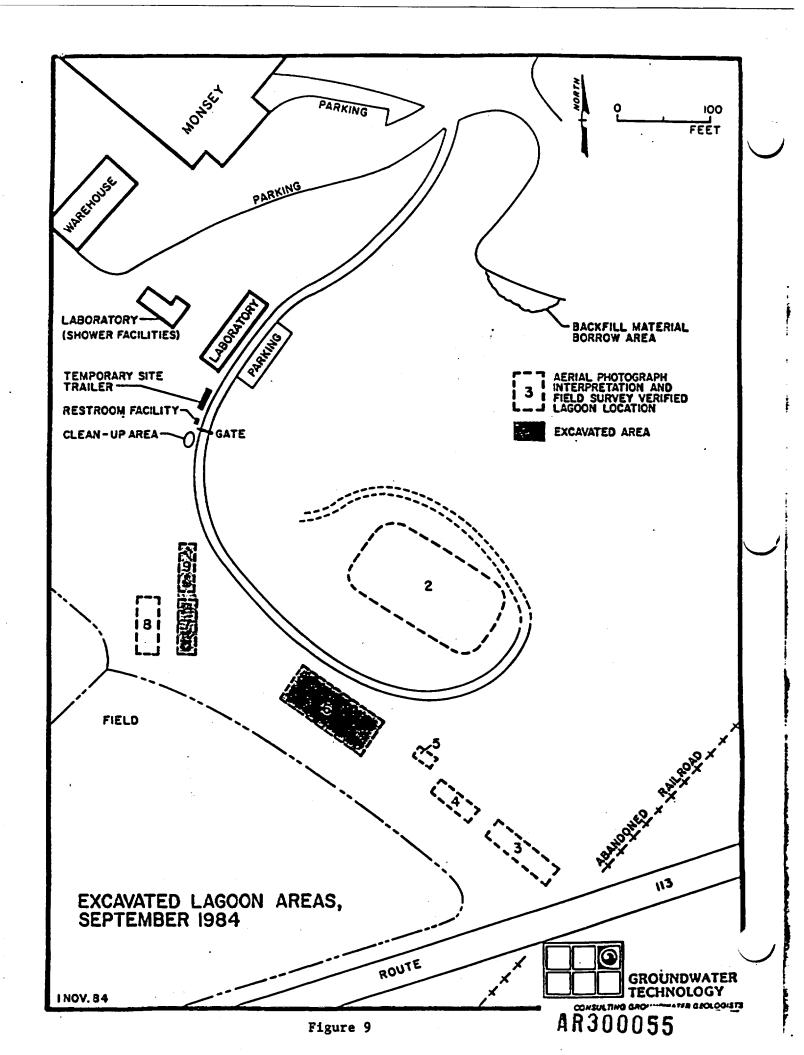

Excavation limits were determined in the field by visual assessment and through photoionizer measurements procured along the base and sides of each excavation. Upon completion of the excavation program, representative soil samples were obtained from pit floors and walls in the presence of PADER or EPA and sample splits were provided to PADER for analysis. Subsequent to this process, marker horizons were placed in each excavation and backfilling was initiated. Site backfilling and restoration were initiated on September 26 and completed on October 8 with the application of vegetative cover material.

The combination of visual assessment, low-level recorded photoionizer readings, and analytical results of post-excavation soil samples all indicate the lagoon excavation remedial action program was successful in removing potential source materials of ground water contamination from the current Monsey site. Data obtained during and subsequent to the excavation program indicate a minimum of 95 percent reduction in total volatile organic compound concentration in these former lagoons.

Currently, sampling and analysis has/is being performed in other lagoon areas identified on the Monsey property.

## 3. Groundwater Contamination


# a. Monitoring Wells

During the period from April through September 1985, a total of 21 monitoring wells were installed in Kimberton within and in the primarily downgradient direction from the general area of current Monsey property (Figure 7). The well installation program was designed to provide definition of local hydrogeology in relation to contaminant movement in the area.

This groundwater monitoring program included the design and supervision of monitoring well installation. Local permits and, where applicable, third-party permission were obtained prior to well installation. Proper well installation specifications and decontamination procedures were established and reviewed by both PADER and EPA.

A preliminary assessment of that groundwater monitoring program, which includes data from the monitoring program, revealed the following:

- Movement of the volatile organic compound (VOC) contaminant plume is primarily controlled by local ground water gradient across the site area (Figures 6 and 10).
- Base neutral compounds were not detected from wells sampled during this program.

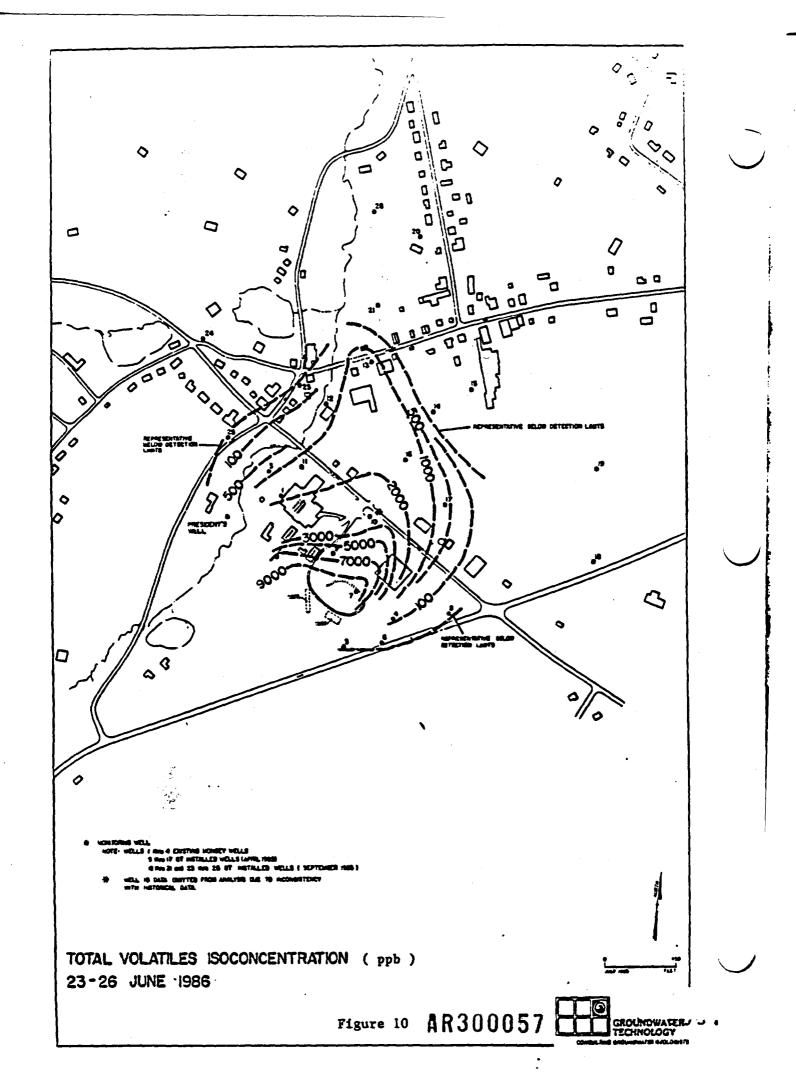

Additional groundwater monitoring wells were installed between February and July 1988 during the Supplemental Remedial Investigation to further define the contaminant plume migration (Figure 7).

#### b. Residential and Private Wells

In August 1985, a program of residential and private well sampling in the central Kimberton area was initiated. Results of this initial sampling program indicated the presence of volatile organic compounds, primarily trichloroethylene (TCE), dichloroethylene (DCE), and vinyl chloride (VC), within the water supply of a number of local residences and commercial establishments. As a result of this sampling program, alternative water supplies have been provided to a total of 25 locations within the Borough of Kimberton. Currently 23 locations receive alternative water supplies (Figure 11).

The collection of data through the ongoing sampling program has and continues to provide useful information on groundwater plume definition and migration pattern.


### 4. Surface Water Contamination

Surface water quality investigations have been conducted on Stream A south of Kimberton Road by Ecology and Environment, Inc. in April 1982 (as part of EPA's FIT study) and by GTI as part of the preliminary site investigation conducted late that same year. Analytical data from stream samples procured during these studies revealed the presence of low levels of VOCs downstream of the Cold Stream Road bridge. These results, together with analyses from samples of springs taken by GTI immediately north of the bridge, indicated that VOCs may be entering the stream primarily from spring discharges.

Stream A sampling conducted by ERM in December 1985, in the downstream direction to a point immediately beyond the confluence of Stream A with effluent from Gotwals Pond, confirmed the presence of VOCs within the stream but with somewhat different distribution. The current stream sampling program is concerned with defining the source(s) of VOCs in Stream A as well as delineating distribution of VOC components. Similar sampling and analysis will be undertaken for Streams B and C which have not been the subject of quantitative investigation to date. The surface water study is designed to characterize surface water flow within the study area to better define preferred zones of ground water discharge and contaminant movement.

#### C. Summary of Site Risks

Trichloroethylene, dichloroethylene, and vinyl chloride are considered the main contaminants of concern at this site. Acute inhalation exposure to TCE causes central nervous system depression. TCE is classified as a probable human carcinogen. Vinyl chloride is classified as a human carinogen.

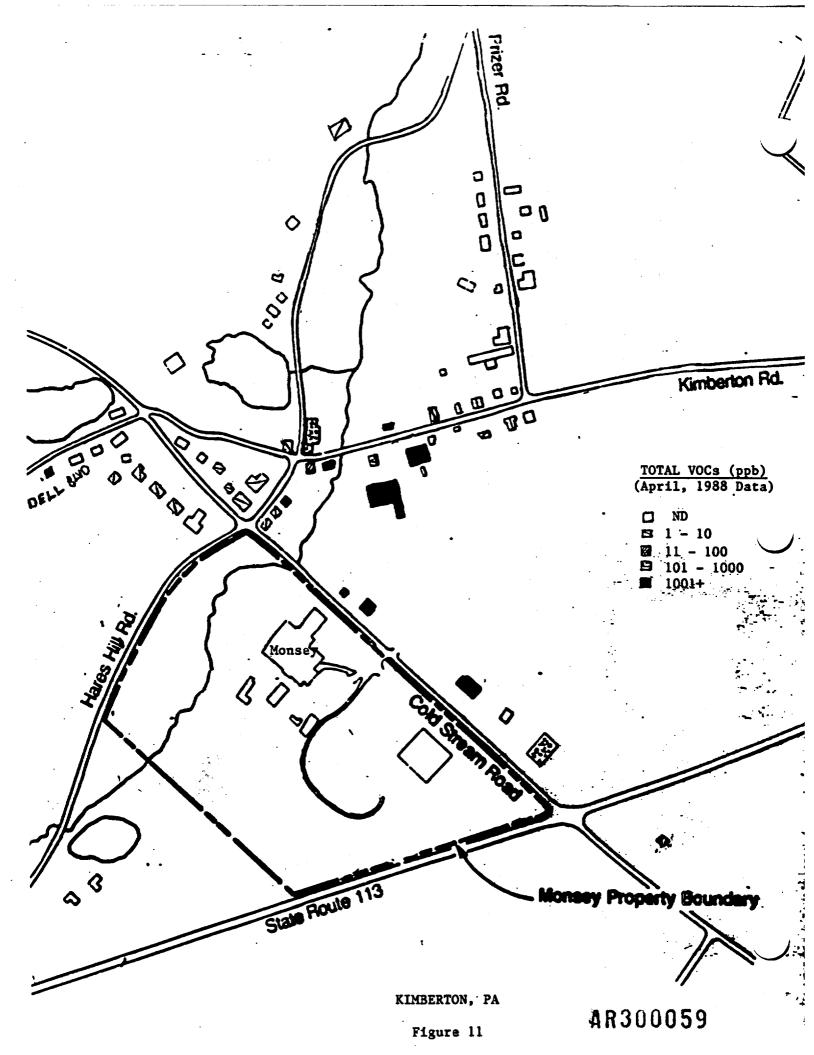

Potential exposure pathways to humans from the use of contaminated groundwater include:

- ingestion of ground water

- inhalation of volatile chemicals released during water use direct dermal contact with contaminated water

Persons at risk of exposure to the contaminants in groundwater include those who have and use contaminated or threatened private wells. Tables 2 and 3 were developed after a review of the CIBA-GEIGY residential well sampling results of August 1985 near the Kimberton Site. Of the twelve volatiles assayed, three are of toxicological concern:

TCE trichloroethylene
DCE dichloroethylene
VC vinyl chloride (chloroethylene).

These three chlorinated ethylenes have carcinogenic potencies which vary over three orders of magnitude:

	10 <sup>-6</sup> cancer risk (ppb)	TCE equivalence	
TCE	2.7	1	
DCE	Ø.033	82	
VC	Ø.Ø15	180	

That is, molecule for molecule, VC is 180 times as potent in cancer induction as TCE. Hence, 10 ppb contamination with VC is more carcinogenic than 1000 ppb contamination with TCE.

In the following analysis, contamination by TCE, DCE and VC for the most severely affected wells is expressed as multiples of 10 risks and added together for a symmation of carcinogenic risk. Six stations exceed a cumulative 10 multiple risk of 500 (i.e., individual risk is over 5 per 10,000). Three additional stations have even higher cumulative risks (0.1, 0.5 and 0.7 percent individual risks) (See Table 1).

In additional to these 9 stations with high cumulative risks, there are several stations with marginal risk (See Table 2).

Table 1

RISK ASSESSMENT OF HIGHLY CONTAMINATED WELLS (KIMBERTON)

Name	TCE*	DCE	<u>vc</u>	TOTAL**	Individual Risk
Rev. Munz		182		182	
C. Amidon	23Ø	333		563	
E. Blank	259	485	267	1011	Ø.13
C. R. Davis	248	424		672	
D. Doran	226	545		771	
J. Effgen	215	455		670	
Altemose	107	242		349	
P. K. Emery	667	1273	4933	6873	0.7%
D. Kulp	1041	606	3333	498Ø	Ø.5%
M. Ludwick	256	364		610 (before GAC)	•
Moore/Yeager	222	515		737	
H. E. Pifer	285			285	
C. Wilson	48	91		139	
T. Pfau		121		121	

<sup>\*</sup> Values expressed as multiple of 19<sup>-6</sup> (hence, cancers per million).
\*\* Cumulative cancers per million lifetime consumers of respective water.

Table 2.

RISK ASSESSMENT OF MODERATELY CONTAMINATED WELLS

Name 3	TCE	DCE	<u>vc</u>	TOTAL
G. Epps C. Fisher		91 61		91 61
K. Phillips	5	61 61		61 66 ·
E. Rittenbaugh D. Sands	מ	61 91	_	61 91

All of the above wells represent greater than  $10^{-4}$  risk and must be avoided immediately for drinking and bathing. In addition, suspension of water for other domestic use in the three cases where individual risk exceed  $10^{-3}$  (9.1%) would be recommended.

# VI. Community Relations History

The main community concerns for the affected residents and businesses revolve around the issues of:

- 1. Groundwater contamination on and off-site
- 2. Quality of alternate water supplies
- 3. Desire of affected residents to remain on private wells

## VII. Remedial Alternative Objectives

The major objective of the remedial action taken at the Kimberton site is to provide a safe drinking and contact water source to those impacted by the groundwater contamination. Based on this objective various mitigation and source control technologies were screened to provide a limited number of technologies applicable to remedial action at the site. The criteria used in this decision making process are the nine evaluation criteria as specified in Section 121 of SARA.

# VIII. Description of the Alternatives

## Summary of Remedial Alternatives

The Center for Disease Control (CDC) has previously reviewed the initial sampling data collected by CIBA-GEIGY in August 1985 which included 67 residential and commercial establishments. CDC at that time certified 12 wells as being unfit for human consumption and also supported alternative water supplies and additional monitoring which had already been initiated by PADER. The Supplemental Remedial Investigation is continuing to fully identify the contaminant source(s) as well as the full extent of groundwater contamination. The findings of this Supplemental Remedial Investigation will be addressed in a subsequent Proposed Remedial Action Plan.

Three alternatives were specifically developed to address the health risk to those residents who may continue to utilize contaminated private wells. These alternatives were identified and evaluated according to specific criteria required by CERCLA.

#### No Action

The NCP requires that the no-action alternative (i.e. no treatment) be considered to provide a worse case basis for comparison with other alternatives. To not continue the current treatment program would not be protective of human health in the short and long-term. The public health problem would continue into the foreseeable future.

#### Alternative 1: No Further Action

Under this alternative, residential and commercial establishments having contaminated wells would continue to receive treatment on an individual basis by filtration utilizing granular activated carbon adsorption. Two additional commercial establishments would continue to receive alternate water in below grade storage tanks. A groundwater monitoring program would also continue which allows periodic reassessment.

AR300062

of the extent of contamination and the concentrations of hazardous substances contained in the groundwater. Both treatment and monitoring are being performed by CIBA-GEIGY and Monsey in accordance with a Consent Order with PADER. Based upon a review of current volatile organic chemical analytical data, this technology has served to reduce to below detectable levels the hazardous substances found in the groundwater obtained from contaminated wells.

- Estimated Annual costs: \$250,000 - 300,000

- Estimated Implementation timeframe: 2-30 years

- Present Worth: \$3,850,000

A human health evaluation was performed and it was determined that in several instances trichloroethylene, dichloroethylene and vinyl chloride exceeded acceptable concentration levels at the contaminated wells prior to treatment. Human exposure to these contaminants in groundwater may lead to adverse health effects. Following treatment, the water falls within acceptable levels for all 3 contaminants. Therefore, this alternative is appropriate because it would be protective of human health. This is an interim remedy and will be reevaluated once the full extent of the groundwater contamination has been defined and the source remediation alternatives have been evaluated. A range of two to thirty years has been estimated as the length of time that residents and commercial establishments will need to use an alternate water source for costing purposes.

# Alternative 2: Temporary Drinking Water

The use of a temporary drinking water source for potable water (i.e. bottled water) is a potential alternative to be implemented until such time that a permanent alternative water supply can be provided for the residents and commercial establishments or the contaminant plume has been remediated. A range of two to thirty years has been estimated as the length of time that residents and commercial establishments will need to use an alternate drinking water sources for costing purposes.

Bottled water can be supplied through delivery to each of the 23 affected locations. The average daily demand for each residence was established for drinking and cooking purpose only. Temporary supply to meet all domestic water needs is impractical since a majority of bottled-water vendors supply five or six gallon storage containers mounted on a free-standing dispenser (bulk storage and dispensing facilities for purchased water would be required to provide alternate contact water for each residence). Therefore, under Alternative 2, all other domestic water needs (i.e. sanitary, bathing, washing, etc.) would continue to be met through the existing contaminated well supplies.

The provision of a temporary water supply to meet drinking and cooking needs would reduce health risks resulting from the ingestion of contaminated well water. However, risks associated with airborne and dermal exposure would continue. The magnitude of the health risk from inhalation and dermal absorption is expected to be comparatively small for a two-year implementation period and would increase proportionately

with increased exposure. For costing purposes the range of two to thirty years has been used.

Estimated Annual Costs:

\$130,000

Estimated Timeframe:

2-30 years

Present Worth:

\$2,002,000

Alternative 3: Water Company Service Connections and Water-Extension (Public Water Supply)

Both the Phoenixville System and Citizens Utility currently supply water to a portion of the residences in the Kimberton area.

Neither Company's existing water distribution systems currently extend to the area in which the contaminated wells are located. Addressing the problem of the contaminated residential wells by replacement with a public water supply would require the extension of the water supply service system(s).

The facilities to extend the water system(s) include approximately 8,000 feet of water main and 23 service connections. The location of water mains and appurtenances for the water service would be finalized during the design phase.

The implementation of this alternative would necessitate abandonment and sealing of the individual residential wells in accordance with the PADER Standard Specifications for Sealing for Abandoned Wells.

Extension of the existing system is technically feasible and implementable, however, some members of the community prefer to continue using their own private wells containing the carbon filter systems. The capital cost for expanding the water company system(s) is estimated at \$1,300,000. The physical expansion of these facilities could be implemented in six to nine months including design, approval, and construction of the system. Six additional months are necessary for administrative purposes, such as securing contracts.

Implementation of this alternative would completely eliminate risk due to exposure to contaminated ground water of residents using the contaminated groundwater for drinking and contact water. It is a viable alternative and represents a permanent solution for providing a drinking water source that meets all criteria for the protection of human health.

- Estimated Annual O&M costs: - 0 -

- Estimated timeframe: 1-2 years

- Present Worth:

\$1,300.000

#### IX. A. Description of Major ARARS

#### Federal

Safe Drinking Water Act - MCLs

Clean Water Act - Ambient Water Quality Criteria

#### State

Pennsylvania Clean - Ambient Water Quality Standards Streams Law - Section 402

Pennsylvania Rules and Regulations Title 25 Chapter 93

# B. Additional Requirements for Protectiveness

The selected site remedy must consider and be consistant with the following:

Federal Executive Order 11988, Floodplain Management 40 C.F.R. Part 6, Appendix A

Action to avoid adverse effects, minimize potential harm, restore and preserve natural and beneficial value.

Federal Executive Order 11990 Protection of Wetlands, 40 C.F.R. Part 6, Appendix A Action to minimize destruction, loss, or degradation of wetlands.

Federal Clean Water Act

Differential Groundwater Policy Class IIA aquifer.

New Jersey Coastal Plain Sole Source Aquifer Action to minimize adverse aquifer impacts

## X. Comparative Analysis

Alternative number 1 includes the continued provision of an alternate water supply (either by carbon filtration treatment or below grade storage tank) for all water needs (contact and drinking uses) and continued monitoring of those impacted wells. In addition, this alternative is protective of human health, complies with the identified ARARS, reduces toxicity, is implementable and provides the most cost effective solution for the short-term since the source of this contamination is to be ultimately remediated. This alternative has been accepted by the State.

Alternative number 2 provides for continued use of contaminated supplies, but includes the provision of an alternate drinking and cooking water supply by bottled water and continued monitoring of those impacted wells. These provisions would reduce health risks resulting from the ingestion of contaminated well water, however, risks associated with airborne and dermal exposure would continue. This alternative is implementable, but does not reduce the toxicity, mobility or volume of contaminants, would be effective by eliminating ingestion exposure in the short and long-term and would comply with identified ARARs. However, both the contact and inhalation exposures would remain so therefore, this remedy would not be protective in either the short or long-term.

Alternative number 3 requires the provision for a public water supply as the alternate drinking and contact water source. This alternative would be protective of human health, complies with specified ARARS, is effective both long and short term, implementable and cost effective. It does not, however, reduce the toxicity, mobility or volume of the contaminants. In addition, further information needs to be supplied by the Supplemental Remedial Investigation before the total impact of this option can be assessed (i.e. area-wide development and water needs and the impact of pumping and treating groundwater on-site on the local groundwater flow pattern).

# XI. Documentation of Significant Changes

No significant changes to the preferred alternative presented in the proposed plan have occured.

## XII. Selected Remedial Alternative

## A. Evaluation Criteria

Section 121 of SARA and the current version of the National Contingency Plan (NCP) (50 Fed. Reg. 47912, November 20, 1985) establish a variety of requirements pertaining to remedial actions under CERCIA. The following nine criteria were used in the evaluation of the remedial action alternatives at Kimberton:

- Overall protection of human health and the environment addresses whether or not a remedy provides adequate protection and describes how risks posed through each pathway are eliminated, reduced or controlled through treatment, engineering controls, or institutional controls.
- Compliance with ARARs addresses whether or not a remedy will meet all of the applicable or relevant and appropriate requirements of other Federal and State environmental statutes and/or provides ground for invoking a waiver.
- Long-term effectiveness and permanence refers to the ability of a remedy to maintain reliable protection of human health and the environmental over time once cleanup goals have been met.
- Reduction of toxicity, mobility or volume is the anticipated performance of the treatment technologies a remedy may employ.
- Short-term effectiveness addresses the period of time needed to achieve protection, and any adverse impacts on human health and the environment that may be posed during the construction and implementation period until cleanup goals are achieved.
- Implementability is the technical and administrative feasibility of a remedy, including the availability of materials and services needed to implement a particular option.

- Cost includes estimated capital and operation and maintenance costs and net present worth costs.
- <u>State Acceptance</u> indicates whether, based on its review of RI/FS and Proposed Plan, the State concurs on, opposes, or has no comment on the preferred alternative at the present time.
- <u>Community Acceptance</u> will be assessed in the Record of Decision following a review of the public comments received on the Administrative Record and Proposed Plan.

## B. Determination of Preferred Remedial Alternative

The preferred alternative is alternative number 1. This alternative selects continued use of individual well treatment by granular activated carbon adsorption as required by PADER's 1986 Consent Order with the PRPs.

The preferred alternative provides complete protection, in the short-term, to groundwater users by treatment of the water at the individual wells. Long-term effectiveness will be obtained by implementing additional remedies identified in the next operable unit which will be available for public comment once developed. The PRPs identified at this Site will continue to maintain carbon filters and water via below grade tanks which provides both drinking and contact water, which upon chemical analysis achieves the current standards.

EPA, in consultation with PADER, has made a preliminary determination that the preferred alternative provides the best balance of tradeoff with respect to the nine criteria. The preferred alternative is anticipated to meet the following statutory requirements to:

- Protect human health and the environment
- Attain ARARS
- Be cost-effective
- Utilize permanent solutions and alternative treatment (or resource recovery) technologies to the maximum extent practicable

In summary, at this time the preferred alternative is believed to provide the best balance of trade-offs among alternatives with respect to the criteria used to evaluate remedies. Based on the information available at this time, therefore, EPA and PADER believe the preferred alternative would be protective, would attain ARARS, would be cost-effective, and would utilize permanent solutions and alternative treatment technologies or resource recovery technologies to the maximum extent practicable.

#### Schedule

The anticipated schedule for completion of the Supplemental Remedial Investigation and Feasibility Study is Spring 1989. Remedial Design and Construction for the final remedy is anticipated to commence in Fall 1989.

# C. Statement of Findings Regarding Wetlands and Floodplains

The focus of this decision is to provide an interim remedial alternative for the contaminated groundwater, defined as the first operable unit for this site. Further work at this site will consider the impact of contamination on wetlands, floodplains and surface water. A wetlands assessment will be performed during the next phase of this project.

## XIII. The Statutory Determinations

## A. Protection of Human Health and the Environment

The selected remedy will reduce and control the amount of groundwater contamination which will ensure adequate protection of human health and the environment. No unacceptable short and long-term risks or crossmedia impact will be caused by implementation of the remedy.

Based on a review of volatile organic chemical analytical data from collected groundwater samples from impacted off-site wells and given the vinyl chloride concentrations in the untreated groundwater, the use of granular activated carbon filters has proven to be successful in reducing the concentrations of the contaminants of concern (TCE, DCE, VC) to non-detectable levels.

## B. Attainment of ARARS

The selected remedy will attain the applicable or relevant and appropriate requirements and are as follows:

#### Federal

Safe Drinking Waste Act

- MCLs

Clean Water Act

- Ambient Water Quality Criteria

#### State

Pennsylvania Clean Streams Law - Section 402

- Ambient Water Quality Standards

# Additional Requirements for Protectiveness

The selected site remedy is consistent with the following:

Federal Executive Order 11988. Floodplain Management 40 C.F.R. Part 6, Appendix A

- Action to avoid adverse effects, minimize potential harm, restore and preserve natural beneficial value.

Federal Executive Order 11990, Protection of Wetlands, 40 C.F.R. destruction, loss, or Part 6, Appendix A

- Action to minimize degradation of wetlands.

Federal Clean Water Act

- Differential Groundwater Policy Class HA acquifer AR300068 New Jersey Coastal Plain Sole Source Aquifer Action to minimize aquifer impacts

## C. Cost-effectiveness

The selected remedy provides overall effectiveness commensurate to its costs such that it represents value for the money. The PRPs are maintaining the current systems described in the selected remedial alternative in compliance with the PADER Consent Order and Agreement. This is a cost savings to the government.

# D. Utilization of permanent solutions employing alternative technologies to the maximum extent practicable

The selected remedy is the most appropriate solution for this operable unit and represents the maximum extent to which permanent solutions and treatment can be practicable utilized.

# E. Preference for treatment as a principal element

The preference is satisfied since treatment is the principal element of the chosen alternative.

APPENDIX A

T. Pfau
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks.

0		:	RAW Sample	Tap			(ID A	Tap		FTER ample	CARBO: Tap	N	!
Sampling Date	Total Gallons	λ	В	c	- [	λ	В	c	! !	λ	В	c	D
08/13/85		4	15	ND	-				-				
10/03/85		4	15	ND	- 1				ļ				1
01/27/86	156			ДK	-	ND	ND	ND	1	1	ND	ND	NDI
05/21/86*	4634	ND	10	DK	- 1	ND	ND	ND		ND	ND	ND	NDI
08/20/86*	7879	BMDL	20	ND	- 1	ND	BMDL	BMDL	1	ND	ND	ND	NDI
11/20/86*	11120	BMDL	10	ND	- 1	ND	ND	ND	l	ND	ND	ND	NDI
2/16/87*	14410	BMDL	BMDL	ND	Ĺ	ND	ND	ND	ı	ND	ND	ND	ND
5/ 4/87*	22150	BMDL	BMDL	ND	Ė	ND	ND	ND	ĺ	ND	ND	ND	NDI
7/27/87*	25250	BMDL	10	ND	i	ND	ND	ND	Ì	ND	ND.	ND	NDI
10/20/87*	29180	BMDL	20	ND	i	ND	ND	ND	ĺ	ND	ND	ND	NDI
1/11/88*	32670	BMDL	10	ND	i	ND	ND	ND	ĺ	ND	ND	ND	BMDL
4/8/88*	41700	ND	BMDL	ND	i	ND	ND	ND	į	ND	ND	ND	NDI

KEY

blank space - not applicable
--- indicates not sampled
ND - none detected
A - 1,1-Dichloroethene
B - 1,1,1-Trichloroethane
C - Toluene
D - Methylene Chloride

Ferrell/Fischer
Submary of Analytical Data for Domestic Well.
All concentrations ug/l, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).

	.,,	RAN San	iple Ta	ıp
ڀ	pling e	A	<b>B</b>	C ,
8	14/85	ИD	ND	ND
5 8	/21/86* /20/86*	ND ND	ND ND	ND ND
11	<b>1</b>	ND ND	ND ND	ND ND
5	8/87*	ND ND	ND	ND ND
10	26/87*	ND	ND	ND
1	18/88* /7/88*	DN DN	ND ND	ND ND
	1			

none detected trans-1,2-Dichloroethene

J. Effpen/Altenode - Risberton Country mouse

Summary of Amplytical Data for Consectio Bull and Carbon System

All concentrations ug/l, parts per billion, pph.

Analyses by IPA methods 601 and 602, CB 624 (indicated by \*).

IID A samples refer to between primary and socondary tanks, left hand train as you face the system

IID B samples refer to between primary and socondary tanks, right hand train as you face the system

13 - 100700000 inter ausbring beneause terreen	it tenestrat:	•
RAM Sample Tap HID A Resple Tag		AFTER CARRIE Sample Tag
Data Callon A B C B B F C A B C B B F	6 8 1 J 8 6 E F	A B C B B T G B I
1/10/06 6657 150 100 4 1 1 4 13) 100 100 100 100 100 100	100 NO 100 NO! 100 NO 1	10 10 10 10 10 10 10 10 10 10 10 10 10 1
1/27/36 65597 100 1 100 100 100 100 100 1	10 1 10 101 125 110 110 1101	20 10 10 10 10 10 10 10 10 10 10 10 10 10
2/17/66 126670 — — — — — — — 100 3 100 100 100 100 100 100 100 100 1	NO NO NO NO! 3 NO NO NO! NO NO NO! 13 NO NO NO!	70 10 10 10 10 10 10 10 10 10 10 10 10 10
3/ 1/66 174757	NO NO NO NO NO 1 NO 1 NO 1	神 神 神 地 埼 美 野 野 10
2/17/86 219902 — — — — — — — 10 60 10 1 1 10 10 2/24/86 243372 — — — — — — — 10 10 10 10 10		ולא לא ל
1/31/86 272658 180 100 100 100 100 100 100 100 100 100	190 RD 180 RD   1 RD 180 RD	NO N
4/14/84 323589 240 310 3 20 20 2 201 20 13 10 10 10 10 10 4/21/96 231382	100 100 100 1001 4, 100 100 100 100 100 100 100 100 100 10	10 10 10 10 10 10 10 10 10 10 10 10 10 1
\$/ \$/\$\$ \$(\$\$\$\$	100 TO 100 101 120 1 2 Hbi	100 110 100 110 100 110 110 110 110 110
	10 10 10 10 10 170 1 2 130 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10	10   10   10   10   10   10   10   10
\$/12/16 496111 156 206 NOS. 10 10 NOS. 20 NOS. 20 10 10 10 10 10 10 10 10 10 10 10 10 10	180   150   180   150   180	
(/1006 610073 10 10 10 10 10 10 10 10 10 10 10 10 10	10 10 10 10 10 14 10 10 10 10 10 10 10 10 10 10 10 10 10	ופי פור מור פור פור פור פור פור
	10	10 TO 10 10 10 10 10 10 10 10 10 10 10 10 10
7/14/86 718529   120 120 120 120 120 120 120 120 120 120	अब्देश अब्देश अव्यास	
8/25/36 \$25600   XP 2 XD XD XD XD	10 10 10 10 10 10 10 10 10 10 10 10 10 1	
\$/25/25 1006/26		10 10 10 10 10 10 10 10 10 10 10 10 10 1
10/20/46 1151786	ומו לת לת לו ולוו שו לוו לוו	10 10 10 10 10 10 10 10 10 10 10 10 10 1
12/29/86 1396450 120 3 30 30 30 30	ופת פא פא פא ופא פא פ	
20 2/ 4/87* 1/3/4640 120 120 120 120 120 120 120 120 120 120	15 10 10 10 10 10 10 10 10 10 10 10 10 10	700 700 700 100 100 100 100 100 100 100
2/ 5/97 1872780		
15 4/ 2/87 1773780 120 HD	100 100 2 100 120 130 130 130 130 130 140 120 1201 1340L 130 130 1301 130 130 130 1301 140 150 1 1301	
\$/22/87 2020100	ומצו לפני מוכי לבני ומוכי ל פוצו מפר	
7/2/87 231399	10 10 10 10 10 10 10 10 10 10 10 10 10 1	10 10 10 10 10 10 10 10 10 10 10 10 10 1
18 1/22/87 2315300	10 10 1 10 1 10 10 10	
19 9/ 2/97 2520930	2 10 10 10 10 10 10 10 10 101	
10/20/87* 2743840 310 430 MCL 10 NCL 101		
11/94/97 2910410	TO TO TO TO TO TO	
12/14/87 2978788 10 10 10 10 10 10	10 10 10 10 10 10 10 10 10 10 10 10 10 1	10 10 10 10 10 10 10 10 10 10 10 10 10
1/11/200 111120	10 10 10 10 10 10 10 10 10 10 10 10 10 1	
10 1/29/10° 3190400 10 10 10 10 10 10 10	10 10 10 10 10 10 10 10 10 10 10 10 10 1	
3/17/40* 3375616	10 10 10 10 10 10 10 10	100 100 100 100 100 100 100 100 100 100
4/04/88* 3525630 230 330 MOL NO NO MCL NO!		
blask space - not applicable		
indicates not sampled 1/ 9/88 - installation date 19 - none detected 3/21/88 231813 (primaries resource 19 - Laboratory Legs or vial use brake upon 5/16/88 453384	, secondarise related to primarise)	
13 - Laboratory lest or vial was broke upon 3/16/85 46348 receipt 7/16/88 728729 3/23/65 1006978		
8 - trans-1,2,-Oichlerosthese 11/24/86 1236285 C - 1,1-Dithlerosthese 2/ 3/87 123688		•
0 - 1, 1-01chloroschane 4/ 1/87 1769678 2 - 1, 2-01chloroschane 5/22/87 2020850		
F = 1,1,1-Trichlorosthase 7/21/87 2313876 0 = Chloroform 9/ 1/87 2317548		
1 - Tellusse 10/21/87 2747096 2 - Nethylane Chleride 12/21/87 277133 3 - Dibermediarymethane 1/21/2448 3185439		
3 - Sthemochlarometham 1175/48 3185626 Tarus Dates 5/02/88 Daugetty 177/89 3378418		
, J		

C. R. Davis 6 Sons

Summary of Analytical Data for Domestic Well and Carbon System

All concentrations ug/l, parts per billion, ppb.

Analyses by EFA methods 601 and 602, 07,624 (Indicated by \*).

MID A samples refer to between primary and secondary tanks, left hand train as you face the system.

MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

EB - indicates first sampling performed following rebedding.

			1	RAT SI	mple	Tap		- !	MID Sample			MID Sample				1	,	LFTER	CARBO	W \$21	uple 7	ap	
Sampling Date	Total Gallons	٦	i	Ĉ.	¯p ¯	Ē	•	6	Α.	i	•		i	7	ē	- <u>-</u>	λ	i	c	ָם מ	Ē	ř	Ğ
8/14/85 1/17/86(1		670 480	780 620	14 10	3	l KD		KD (	-														
1/27/66(1		500	730	ND	ND	ND.	ND	ND.	MD		100	MD.	1	MD	MD	. MED 1	,	,	ND	MD.	MD	MD	Mil
2/17/86 5/22/86*	43950 69990	550	620	BHDL	MD	MD.	BMDL	j	MD.	ND ND	MD I	MD MD	10 10	MD MD	10	MD)	I ND	, 3 80	MD MD	10 10	MD	ND ND	KI
8/21/86* 11/20/86*	100550 131010	530 490		EMOL	10		BIOL	NO	10 10	ND ND	MD I	MD MD	MD MD	KD KD	XD	MD I	10	10	MD MD	10	NO NO	10	NT.
2/10/87*	(2) (3) 7980	490 520		BHOL	10	10	HOL	BHDL	10	: MD	MD (	· 100	100	MD RHDL	10	MD I	100	3ED	MD MD	10 10	100	10 10	. BCD
7/27/87* B 8/17/87*	29830 43000	600	760		ND.	M			10	MD MD		100	10	10 HD	10	MD (	10	100	100	100	***	ND.	W.
10/20/87*	58080 76320	380	610 760	MOL	100	10 10	MD BMDL	NO I	ND:	10	) MD   MD	10	10 10	10 10	10 10	MD (	MD MD	NO NO	MD MD	10	ND ND	10	ME
4/6/81• EEY	114610	620	640		XD	10	XD	MD	Rebed	MD	MD) Sallon	IID.	MD	MD	) ND		MD.	MD.	ND.	MD	ND.	XD	HO

8/14/87 42810

1 - signifies new well installed in 1/86.
2 - flow mater was removed from service by owner.
3 - new mater was installed on 4/14/87.
blank space - not applicable
--- indicates not sampled
ED - none detected
A - Trichloroethene
B - trans-1,2,-Dichloroethene
C - 1,1-Dichloroethene
D - 1,2-Dichloropropane
D - 1,1-Trichloroethene
F - Vinyl Chloride
G - 1,2-Dichloroethane

D. Sands
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per billion, ppb.
Analyzes by EFA methods 601 and 602, OR 624 (Indicated by \*).
MID A samples refer to between primary and secondary tanks.

			RAM Sample	Tap	MID :		1		FTER emple	CARBO Tap	Ħ
Sampling Date	Total Gallons	À	- 5	c	λ	В	- c	λ.	3	_ c	<u>-</u>
8/12/85		3	1	91			·				
10/ 3/85 2/03/86	1008	3	2	91	ИD	ND	ND	ND	ND	ND	
5/22/86* 8/21/86*	21135 42539	ND BMDL		BMDL(	ND ND	ND ND	BMDL	ND ND	ם מא	ND ND	
11/20/86*	60180	BMDL		BADL	. מא מא	ND	NDI	ND	ND	ND	
2/10/87*	75994 91480	BMDL		BMDLI	MD	ND	NDI	KD	ND	ND ND	
5/ 8/87° 7/31/87°	NA	BHDL BHDL		BADL	nd ND	ND ND	BMDL	ND ND	ND	ND ND	
10/26/87*	124460	M		BADL	ND	ND	BMDL	МD	ND	ND	
1/18/88* 4/06/88* KEY	139210 153700	erd l ND		endl  Endl	ND ND	ND ND	BMDLI	ND ND	ND	ND ND	

blank space - not applicable
--- indicates not sampled
ND - none detected
A - 1,1-Dichloroethene
B - 1,1-Dichloroethane
C - 1,1,1-Trichloroethane

Issue Date: <u>5/12/88</u>

J	j				کیں ما وصا	tap			1		KII Sanpi	A le Sag	,	1		- {			ID B ple Te	9			- 1		NTTER Sanp Le		Ħ			1
	ampling uto	Total Callens	`.	_ <b>i</b>	٠.	•	i	7	•	- A	٠,	c	•	18	- P	-			¯ e¯	•	i	•	-	A	•	c	•	:	•	
	1/12/05		500 350	260	17	7	3	100	10					-			-							10	TRD	100	10	100	to.	
	1/27/05	1653 9530	=	=	=	=	=	=	=		1	100	10	BB	2	100 E	j - 1		9 100	100	#D	100	MD I	160 760	WD WD	10	ND ND	NO NO	WD	MD I
	3/21/06* 0/20/06* 1/20/06*	19630 32330 42390	480 600 478	320 330 270	10 20 10	100	MOT MOT	100	30) 10) 30)		SHOL SHOL SHOL	100	#D	88	ED ED	NO.	1		L ND	88	#D	80	MD!	19 19	#D	8	RD	100	10	10
	2/16/07* 3/ 2/87*	\$1820 \$3550	610	410		201		100	30	100	Seci.	200	ED.	888	WD Wo	10	BHE		90	100 100 100	ED ED		101 101	100	ND ND	88	TED COM	88	10	10
	3/ 4/87*	61444 741 <b>9</b> 0	390 710	340		BOL	MOL	10	301	100 200	SHOT,	88	ND ND	10	MD MD	10	340	D BHD	. WD	E .	WD	100 100	MD I			10	20 20	100	100 100	#C
	1/11/88*	84820 95270	\$70 \$20	360	10	HOL	DOL		MOL	100	SHOT.	88	100	100	10		300	io be	L ND	100	ND ND	8	MDI	100	ND ND	100	MD	100	WD WD	101
	4/06/68.	104330	310	300	MOL		HOL		ED) labori late		Caller Caller	. 30	MD.		<b>3</b>	-		e inc	. 100	10	MD.				20		MD.	180	MD.	101
	black space	e - mot a	00114	able led				-	3/ 1/		134		•	(200																
	TO - BOOM									<del>-</del> -	,	-		- 1																

AR300076

# W. Hopwood / H. E. Fifer Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/l, parts per billion, ppb. Analyses by EPA methods 601 and 602, CR 624 (indicated by \*). MID A samples refer to between primary and secondary tanks, left hand train as you face the system. MID B samples refer to between primary and secondary tanks, right hand train as you face the system. RB - indicates first sampling performed following rebedding.

					RAN Sampl	• Tip	ı			s	MID ample			!	8	NID Ample			(			FTER (					
	Sampling Date	Total- Gallons		,	`c	3	•	7		•	c	5	8			3	c	ъ.	2	•	A -	•	Ē	- D	ī		
RI RI	10/26/87*	3290 12316 27297 39220 50230 54182 60221 70770 82000 84508 92928 104488 108720 116248	770 640 	#30 770 780 780 710 650	BIOL BIOL BIOL BIOL BIOL BIOL	MOL MOL MO MO MO MO	BIOL BIOL BIOL BIOL BIOL BIOL	10X 10X 10X 10X 10X 10X 10X 10X 10X 10X	ATI BEOLE BROLE Rebed Cata	HOLESOL	10 10 10 10 10 10		       		. ND ND ND PAOL ND	4 4 28 29 29 29 29 20 20 20 20 20 20 20 20 20 20 20 20 20				-		E STORY CONTROL OF STOR				ומג ומג ומג ומג ומג ומג ומג ומג ומג	
	indi MD - nons A - Trichl B - trans- C - 1,1-Di D - 1,2-Di	cates not detected oroethens 1,2,-Dick chloroeth chloropro	sam; loros ane pane	then					12/22 8/17 2/15	/87	\$399 \$439 10846	10			,	<i>;</i>											

C. Amidon/T. Foster - Cricket Corner
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per hillion, pph.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
HID A samples refer to between primary and secondary tanks, left hand train as you face the system.
HID B samples refer to between primary and secondary tanks, right hand train as you face the system.

																											-
	,,			_ 1	LANE SA	mple	Tap			MID	A Sa	mple	Tap	i		MID	B 54	mple	Tap			<b>U</b> TER	CARBO	N Sam	ple T	ap	ļ
\	ling	Total Gallons	Α.	3.	c.	3	E	7	A	3	<b>e</b>	Ð	E	F	A	1	c	Þ	ì	7	A	1	c	Þ	Ē	7	
11/ 11/ 5/ 6/ 11/ 2/ 5/	14/85 07/85 27/85 21/86* 20/86* 20/86* 10/87* 15/87*	230 560 3111 4550 5820 6950 6130 9200 10400	570 570 610 400 340 650 470	740 460 370 630	MOL MOL MOL MOL		SMOL SMOL STO STO STO	MD M			98888888				MD MD MD										80 80 80 80 80 80 80 80 80		1 1 1 1 1 1
1/	9/88*	11770 1 <b>279</b> 0	560 440	710	BHDL	ND ND	N/D	MD	KD	ND ND	MD MD	#D	MD MD	ND I	MD	MD MD	100	MD MD	10	MD (		10 10	#D		MD MD	10	i ·

# R. Adams Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/l, parts per billion, ppb. Analyses by EPA methods 601 and 602, OR 624 (indicated by \*). MID A samples refer to between primary and secondary tanks.

		Sai	RAW mple :	Tap		MID A mple T	ap		FTER BON T	ap į
Sampling Date	Total Gallons	A	В	ci	A	В	ci	A	В	- c-}
8/12/85		8	5	21			·			1
10/ 4/85		2	1	21			İ			1
3/17/86	8585			1	ND	ND	NDI	ND	ND	NDI
5/21/86*	32655	ND	ND	ND	ND	ND	NDI	ND	ND	IDK
8/20/86*	60659	BMDL	BMDL	BMDLI	ND	ND	NDI	ND	ND	וסא
11/21/86*	94010	10	BMDL	ND	ND	ND	NDI	ND	ND	NDI
2/10/87*	126666	ИD	ND	ן סא	ND	ND	וסא	ND	ND	ND
5/ 4/87*	159028	ND	ND	ND	ND	ND	ICK	ND	ИD	ND
7/27/87*	195390	BMDL	ND	ND	ND	ND	ND	ND	ND	ND
10/20/87*	225820	10	BMDL	ND	BMDL	BMDL	NDI	ND	ND	ND
1/11/88*	255910	ND	ND	ND	ND	סא	ND	ND	ND	ND
4/06/88*	286560	ND	ND	ND	ND	ND	וסא	ND	ND	ND

#### KEY

blank space - not applicable --- - indicates not sampled

ND - none detected BMDL - Below minimum detection limit

A - Trichloroethene
B - trans-1,2,-Dichloroethene
C - Tetrachloroethene

E. A. Solomon Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/l, parts per billion, ppb. Analyses by EPA methods 601 and 602, OR 624 (indicated by \*). MID A samples refer to between primary and secondary tanks.

			. 5	RAW ample	a Tap	!	MID Sample			_		FTER ample		N I
Dat	pling e	Total Gallons	λ.	B	ີເ	D	Ā	. B ;.	်င	_D	_A _	В	c	D
2,			190	53	3	1								
	24/86	984				!	ND	ND	ND	NDI	ND	, ND	ND	ND
	21/86*	13107	250	70		ND I	ND	ND	ND	NDI	ND	ND	ND	NDI
	20/86*	27120	280	110	BMDL	NDI	ND	ND	. ND		ND	ND	ND	NDI
11/	20/86*	41210	230	70	BMDL	BMDL	ND	- ND	ND	NDI	ND	ND	ND	NDI
2,	16/87*	52240	210	-50	BMDL	ND I	ND	BMDL	ND	NDI	ND	ND	ND	ND I
5,	8/87*	62930	280	70	BMDL	BMDL	ND	BMDL	ND	ND	ND	ND	ND	NDI
8,	4/87*	76140	280	70	BMDL	ND	ND	BMDL	ND	ND	ND	ND	ND	ND
10	26/87*	87810	240	60	ND	ND i	ND	ND	ND	ND	ND	ND	ND	ND
1	19/88*	103880	190	60	ND	ND I	ND	BMDL	ND	ND	ND	ND	ND	ND
	/7/88*	118670	270	60	ND	ND	BMDL	BMDL	ND	NDI	ND	ND	ND	ND

nk space - not applicable
- indicates not sampled
- none detected
Trichloroethene
trans-1,2-Dichloroethene
1,1-Dichloroethene
1,2-Dichloroethane ьl

ND A B C

AR300080

D. Adams - Kimber Hall

Summary of Analytical Data for Domestic Well and Carbon System

All concentrations ug/l, parts per billion, ppb.

Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).

MID A samples refer to between primary and secondary tanks, left hand train as you face the system.

MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

		Sai	RAW mple :	[ap	Samp	D A le Tap	- [		MID B mple T	ap	C.	afte Arbon		1
Sampling Date	Total Gallons	λ.	3	С	A	В	c	λ	В	c	A	3	c	D
8/14/85 10/ 4/85		2 2	8	ו מא ו מא			   							1
2/19/86	27495			!	ND	ND	121	ND	ND	ND	ND	ND	ND	11
5/21/86*	70279	BMDL	10	NDI	ND	ND	ND	ND	ND	NDI	מא	ND	ND	NDI
8/20/86*	110913	ND	10	NDI	ND	ND	ND	מא	ND	NDI	מא	ND	ND	NDI
11/20/86*	153440	BMDL	BMDL	ND i	ND	ND	NDI	ND	ND	NDI	ND	ND	ND	NDI
2/11/87*	203260	BMDL	BMDL	NDI	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
5/13/87*	263080	BMDL	BMDL	וסא	סא	ND	NDI	ND	ND	ND	ND	ND	ND	ND
8/14/87*	315300	BMDL	10	NDI	ND	ND	NDI	ND	BMDL	ND	ND	ND	ND	NDI
10/26/87*	350240	ND	BMDL	ND I	ND	ND	ND	ND	BMDL	ND	ND	ND	ND	ND
1/19/88*	392050	BMDL	BMDL	ND	ND	BMDL	ND	ND	BMDL	ND	ND	סא	ND	ND
4/07/88* KEY	426270	BMDL		BMDL	ND	BMDL	NDI	ND	BMDL	) DN	ND,	ND	ND	ND

blank space - not applicable --- - indicates not sampled

ND - none detected
A - 1,1-Dichloroethene
B - 1,1,1-Trichloroethene
C - Trichloroethene
D - Tetrachloroethene

Weaver
Summary of Analytical Data for Domestic Well,
All concentrations ug/l, parts per billion, ppb.
Analyses by FPA mathods 601 and 602. OR 624 (indicated by \$1

	RAW San	ple f	P
Sampling Date	A	8	c
8/12/85 5/21/86* 8/20/86* 11/20/66* 2/10/87*	, NO NO NO NO NO	ND ND ND ND	10 10 10 10
5/ 4/87* 7/27/87* 10/20/87* 1/11/87* 4/6/88*	ND ND ND ND	ND ND ND ND	

KZY

ND - none detected A - trans-1.2-Dichloroethene

B - Trichloroethene

- - 1,1,1-1110

J. Daugherty

Little / Eddinger
Summary of Analytical Data for Domestic Well.
All concentrations ug/l, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).

	RAW Sa	mple Tap
Sampling Date	A	3
8/14/85	ND	ND
5/22/86*	סא	ND
8/20/86*	ND	ND
11/20/86*	BMDL	BMDL
2/16/87*	ND	ND
5/ 8/87*	ND	ND
8/ 4/87*	ND	BMDL.
10/27/87*	ND	ND
1/23/88*	ND	ND
4/18/88*	ND	ND
KZY		

ND - none detected A - Trichloroethene B - trans-1,2-Dichloroethene

Issue Date: 5/

K. Phillips
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks.

			RAW Sample	Tap	•	1	MID A Sample Tap	-		FTER e	CARBO	N
Sampling Date	Total Gallons	λ	В	ີ່ເ	ם -	!	A B C	_ D	- A	В	c	ם
8/14/85 10/ 7/85		16 16	3 3	1	2 ND	-						
4/21/86	6736					ı	ND ND ND	ND	ND	ND	ND	ND
5/21/86*	10884	30	BMDL	ND	ND	1	ND ND ND	ND	ND	ND	ND	ND
8/21/86*	23678	20	BMDL	ND	ND	1	ND ND ND	ND	ND	ND	ND	ND
11/20/86*	35040	10	BMDL	ND	ND	ı	BMDL ND ND	ND	BMDL	ND	ND	ND
2/10/87*	44180	30	BMDL	ND	ND	1	ND ND ND	NDI	ND	ND	ND	ND
5/14/87*	53810	20	BMDL	ND	ND	Ĺ	ND ND ND	ND	ND	ND	ND	ND
8/ 4/87*	98990	20	BMDL	ND	ND	i	ND ND ND	ND	ND	ND	ND	ND
10/26/87*	120180	10	ND	ND	ND	Ĺ	ND ND ND	NDI	ND	ND	ND	ND
1/18/88*	129300	10	ND	ND	ND	ĺ	ND ND ND	NDI	ND	ND	ND	ND
4/6/88* KEY	136390	20	BMDL	ND	ND	İ	ND ND ND	ND	ND	ND	ND	ND

blank space - not applicable
--- - indicates not sampled
ND - none detected
A - Trichloroethene
B - trans-1,2,-Dichloroethene
C - Chloroform
D - Dibromochloromethane

G. Epps
Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/l, parts per billion, ppb
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks.
RB - indicates first sampling performed following rebedding.

Rebed Date Gallon Reading

8/17/87 244500

	0	_		AW   Tap		ID A ple Ta	p	AFTER Samp	CARB	
	Sampling Date	Total Gallons	λ	B	λ	В		λ	3	
	08/14/85		3	12 l			!			!
	10/03/85 1/27/86	1467		15	ND	ND	-	ND	ND	1
	5/22/86* 8/21/86*	42722 102597	BMDL BMDL	20 ( 10 (	DN ND	DK DK	- {	ND ND	ND ND	- [
	11/20/86*	138470	BMDL	101	ND	ND	ij	ND	ND	ij
	2/10/87* 5/ 4/87*	169689 199706	BMDL ND	10) BMDL	DK DK	nd BMDL	) 	ND ND	nd Nd	1
RB	7/27/87* 8/18/87*	236950 244800	DM	BMDL	D D	10 ND	!	ND	סא	-
7.5	10/20/87*	268060	BMDL	BMDL	ND	ND	į	ND	ND	ij
	1/11/88* 4/15/88*	295250 330870	ND ND	BMDL	DИ Dи	nd BMDL	; 	ND ND	ND ND	_ <u> </u>

blank	SDACE -	not	applicable
			sampled
	T11/4T-=		- Action Tea

ND - none detected A - 1,1-Dichloroethene B - 1,1,1-Trichloroethane

Issue Date:

KEY

C. Fisher / A. Hawkes
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/1,parts per billion,ppb
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks.

014	man a 1	S	RAW ample	Tap		ID A	[ap	AFTER Sample		N I
Sampling Date	Total Gallons	A	B	- c	_A _	В	c	· A	В	c
8/12/85		1	2	4						
10/ 7/85		1	2	4 !	***			***	***	
4/ 7/86	16361				ND	ND	ND	.ND	ND	NDI
5/22/86*	27445	ND	ND	BMDL	ND	ND	ND	ND	ND	NDI
8/20/86*	59000	/ ND	ND	<b>BMDL</b>	ND	ND	ND	ND.	ND	NDI
11/20/86*	103050	BMDL	ND	BMDLI	ND	ND	ND	ND	ND -	ND
2/10/87*	162369	BMDL	ND	NDI	ND	ND	ND	ND	ND	NDI
5/ 4/87*	207358	BMDL	ND	BMDL	ND	ND	NDI	ND	ND	NDI
7/27/87*	226830	ND	ND	BMDL	ND	ND	NDI	ND	ND	NDI
10/20/87*	257250	ND	ND	BMOL	ND	ND	BMDL	ND	ND	NDI
1/11/88*	284650	ND	ND	BMDL	ND	ND	BMDL	ND	ND	ND
4/7/88*	302680	ND	ND	ND	ND	ND	ND	ND	ND	ND

KEY

blank space - not applicable
--- indicates not sampled
ND - none detected
A - trans-1,2-Dichloroethene
B - 1,1-Dichloroethene
C - 1,1,1-Trichloroethane

# O. Lowrey - Sign of the Bear Apartments Summary of Analytical Data for Domestic Wall and Carbon System All concentrations ug/l, parts per billion, ppb. Analyses by EFA methods 601 and 602, CR 624 (indicated by "). MID A samples refer to between primary and secondary tanks, left hand train as you face the system. MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

	•	:	RAI Sample				ļ		ID A		j		ID B		ļ			CARBO		
Sampling Date	Total Gallons		•	c	֓֞֞֞֞֞֞֞		ί.	Sampl. A	Tug T	C	D	A	ling	C	D	A 3	3	ng Te	<b>,</b> ,	
8/13/85 10/ 4/85		16	20	100	2	ND CN	]													
3/ 3/86	10125						į	XD	XD	ND.	ND i	ND.	XD	MD	ומנ	XD	XD	XD	700	MD
5/22/86° 8/20/86°	45740	AD AD	BHOL	XD)		ND ND	1	XD 200	ND ND	מא מא	ו כמונ ( כמונ	פנוג פנוג	עא פא	XD XD	ND) I CK	בא כא	XD XD	)(D)	)(D)	סוג מוג
11/21/86*	134290	XD	CIK	MD	XD	ND	į	ND ND	ND CN	10	ND(	XD XD	ND ND	MD DK	XD I	ND D	XD OX	ND CN	ND ND	מא
2/18/87* 5/ 8/87*	178830 221160	10) (01)	BMDL ND	KD KD	NOT TO	and l	1	ND ND	ND ND	10) (01)	XD	10	KD	)(D	ומונ	XD	XD	ND.	XD	X
8/ 4/87*	265450	MOL		10			į	)(D)	ND ND	ND OK	100 j	7CD	)(D)	XD	ND I	)(D)	KD KD	XD XD	10 10	ND CN
10/27/87*	301350 34 <b>6</b> 330	XD) CIX	PHOT ND	XD AD	PHOF	ND ND	I	ND	XD	ND UN	XD(	XD	XD	ND	KD	XD	XD	XD	KD	ND
4/15/88*	400030	KD	XD	XD	MOL	ND	1	XD	XD	ND	ND I	XD	MD	XD	KD I	KD	KD	10	XD	XD

blank space - not applicable
-- indicates not sampled
HD - none detected
A - Trichlorosthene
S - trans-1,2,-Dichlorosthene
C - 1,1-Dichlorosthene
D - 1,1-1-Trichlorosthene
Z - 1,1-Dichlorosthene

AR300087

Rev.Munz / Centennial Evangelical Lutheran Church
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks, left hand train as you face the system.
MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

	ľ	•					1 1 to 1.	71 A. J.					
_	]			RAW ple Tap		D A le Tap	* #		MID B mple Tap			AFTER RBON Ta	ιρί
	mpling te	Total Gallons	A	В	A	В		A	В	-  -	A ~	В	1
_	/13/85 / 3/85		6	28 25	<b></b>								-
	/17/86	1222			ND			ND	ND	•	ND	ND	1
	/21/86* E/21/86*	58350 96932		20 20	I ND			ND ND	ND ND	•	ND ND	ND DN	-
1	1/21/86* 2/10/87*	138360 177265		10 20	I ND		1	ND ND	ND ND		nd Nd	ND ND	ļ
	/ 4/87* /27/87*	212510 252540	BMDL	10 10	ND ND	ND	ાં	ND ND	ND BMDL	i	ND	ND	į
1	/20/87*	288630	BMDL	10	ND	BMDL		ND	BMDL	i	nd Nd	ND ND	
	1/11/88* <b>(</b> /08/88*	324100 361480	nd Nd	10 10	I ND		!	ND ND	BMDL BMDL		nd Nd	nd Nd	-

E. Rittenbaugh Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/1, parts per billion, ppb. Analyses by EPA methods 601 and 602, OR 624 (indicated by \*). MID A samples refer to between primary and secondary tanks.

		:	RAW Sample	Tap	1	MID Sample			_	FTER ample	CARBON Tap	1
Sampling Date	Total Gallons	λ	В	- c	1	λ	В	c	λ	3	c	-
8/13/85		2	10	ND	- [							-
10/ 7/85 2/ 3/85	1777		10	ND 	i	מא	ND	ומא	ND	ND	ND	i
5/22/86* 8/21/86*	20204 39576	BMDL ND	BMDL BMDL	ИD DK	1	nd Nd	ND ND	ND   ND	ND ND	ND ND	ND ND	1
11/20/86*	52970 66750	ND ND	BMDL	ND ND	İ	ND ND	DK DK	BMDL I	ND ND	ND DK	ND ND	į
5/15/87*	80810	ND	BMDL	ND	į	ND	ND	ND	ND	ND	ND	į
7/27/87*	100220 117670	ИD ИD	BMDL	ND ND	ļ	ND ND	DK DK	BMDL	ND ND	ND ND	ND ND	ì
1/18/88* 4/7/88*	134920 143470	ND ND	BMDL BMDL	ND DN	1	ND ND	BMDL	ND I I dn	ND ND	ND OK	ND ND	ł

KEY

blank space - not applicable
--- indicates not sampled
ND - none detected
A - 1,1-Dichloroethene
B - 1,1,1-Trichloroethane
C - Trichloroethene

#### E. Blank - Rimberton Ancoro yumany of Analytical Data for Dumestic Well and Carbon System All concentrations my/l, parts per billion, myb. Analyses by ETA methods 601 and 602, CR 62f (indicated by \*), HID a samples refer to between gribary and secondary tanks, left hand train as you face the system. HID B samples refer to between gribary and secondary tanks, right hand train as you face the system

I	/				3# E4	مارس	Top		!		MID	A Sa	ple	Tap	14.7			MID	3 Sa	mple :	tep		-	,	FTER	وننت	ı taş	ple B	ap		
1	Sampling Date	Total Gallens	À	•	e -	•	Ē	<u>,                                     </u>	•	A	•	e	•		7	•	_ A	•	c c	D.	i	· • -	4			ē	-p -	•		•	
1	8/12/85 10/24/85 11/22/85 2/13/46 3/22/86 8/20/84 11/20/86 21/20/86 21/20/86 2/10/87 8/ 4/87 8/ 4/87 10/26/88 11/22/86 11/22/87 11/26/88 4/ 4/87 11/26/88 4/7/88	700 3340 3816 7314 10460 27270 29240 32694 39110 40800 49500 49530 53160	700 700 340 378 379 370 229 300 200 270 370 319	840 1000 446 700 830 830 830 400 420 840 840	NOL NOL NOL NOL NOL			100	SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL SHOLL	100	HOL HOL HO HO HO HO						MD NO	13 20 20 20 20 20 20 20 20 40 40 10 10 20 20 20 20 20 20 20 20 20 20 20 20 20			日本の日本の日本の日本の日本の日本の日本の日本の日本の日本の日本の日本の日本の日			353 3 33 33 33 3		555 9 56 55 55 5		និង នៅ នៅ និង និង និង និង និង និង និង និង និង និង	100 100 100 100 100 100 100 100 100 100	888   8   8   8   8   8   8   8   8	
1	MD - mone (	o - not o enter not detected areathement, 2,-Diel dhierorth shieropro Trichlore Chieride sis jedie	Large Large Mane Spane Sethan	lod these		nimi	- 1	2/22/ 5/21/ 6/13/ yties	187 187	2926 4076 461.4	200	<del></del>							•												

W. N. Marchionne

Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/l, parts per billion, ppb.

Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).

MID A samples refer to between primary and secondary tanks.

	s		RAW   B Tap	MID Sample			TER CA	
Sampling Date	Total Gallons	λ	 B	λ	-   B	- A	В -	
8/13/85		2	9	J				
10/ 4/85		2	11		!			ļ
2/17/86	2040		!	ND	ND	ND	ND	i
5/21/86*	17907	ND	BHDL	ND	וסמ	ND	ИD	l
8/21/86*	33805	ND	BMDL	ИD	ן מא	ND	ND	- 1
11/21/86*	49252	ND	BMDL	ND	ND (	ND	ND	1
2/10/87*	62361	ND	BMDL	ND	ND	ND	מא	ì
5/ 8/87*	77230	ND	BMDL	ND	ND	ND	ND	j
8/ 4/87*	91260	ND	BMDL	ND	NDI	ND	ND	i
10/26/87*	105790	ND	BMDL	ND	NDI	ND	ND	i
1/18/88*	120700	ND	BMDL	ND	ND	ND	ND	i
4/6/88*	133970	ND	BMDI.I	מא	ND I	מא	ND	i

#### KEY

blank space - not applicable
--- - indicates not sampled

ND - none detected A - 1,1-Dichloroethene B - 1,1,1-Trichloroethene

M. Ludwick

Summary of Analytical Data for Domestic Well and Carbon System

All concentrations ug/l, parts per billion, ppb.

Analyses by EFA mathods 601 and 602, OR,624 (indicated by \*).

MID A samples refer to between primary and secondary tanks, left hand train as you face the system.

MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

BB - indicates first sampling performed following rebedding.

$\left  \right $	Sampling Date	Total Gallons	٠,٠		RAI Bample C				-	-	 	MID	A Tap	- D			MID Sample			-	-	AFTER Sampl				- ,-	-
1	8/13/85		690	700	12	٠٠	2	CN	MD I						j						***						
-	11/ 7/65	436	620	590	MD.	KD	NO.	KD	MD!	٠.	200				i					i	. 1	כוו ל	ND	ND	MD	MD.	aco i
1	11/27/05	2313			•				)		2	4	MD	MD	100	7	10	MD	ND	MDI	X	סא ס	KD	MD.	MD	MD	ND:
	1/ 3/86	5144							`		2	4	MD:	MD		9	13	ND	ND	NO!		1 MD	ND.	NO.	MD	100	ND I
	1/27/66	6952				*					2	- 4	ND.	KD	NO!	5	•	MD	MD	MD I	36	מא פ	10	NO.	MD	MD	NO 1
- 1	3/21/86*	16095	690	670	10	. ND	BMD L	POL	BOLL	101	or be	DL.	MD :	ND.	וכונ	BHOL	20	ND	XD	MD I	M	סוג ס		10	MD	MD	HD (
	8/21/86*	23511	689	710	10	MD	EMDL	NO.	POLI	' 1		<b>DL</b>	MD	ND	) COK	EMDL	20	ND	MD	101	1	כאו כ	ND.	10	ND	KD	100
	11/20/86*	30670	570	790	10	ND	, NO	ND.	BHOL	. 1	(D)	10	MD	ND.	M(2)	BHDL	20	MD	ND	NO!	×	מא ס	MD	10	ND.	MD.	MD i
l i	E 12/23/86*	33242									<b>D</b>	MD	ND.	10	NO!	MD.	MD.	KD	KD	IID I							
- 1	2/10/67*	37018	550	€80	BOL	100	ND.	ND.	100	1	(D)	MD.	MD	MD	MD)	MD.	MD.	MD.	KD	MQ (		D ED	HTD:	- XD	<b>2</b> D	10	100
ı	5/ 8/87*.	44930	570	630	BHOL	ND.	XD.	, MD	300	: 1		OL:	10		100	MD.	SHOL	MD.	ND	MO I	N.	D 100	MD	***	100	MD.	KD i
- 1	8/ 4/87*	\$2240	590	800	10	BMDL	MOL	10	100			OL.	NO.	NO.	NO!	100	BIOL.	KD	ЖÞ	IID I	×	מו ס	10	ND.	NO.	MD	IID I
- 1	10/26/67*	59660	570	760	MD.	10	ND.	MD	RD	1		DL	MD	N.	MD (	KD	MOL	MD.	MD	- KD			MD.	MD	NO.	MD	IFD (
- 1	1/10/68*	67720	630	770	BIOL	MD	BHOL	ND.	NO!	201	72	20	10	· ND	MD I	BHOL	20	MD	<b>X</b>	aro i	x	כתו ס	300	ND.	MD	MD	KDI
)ı	B 2/16/88*	70560								1	₩ .	MD	100	) IID	MD	3170	KD	ND.	10	ND I							
	4/6/68*	75520	€30	650	MOL	MD	MD	100	MD (	1		ØL.	100	N.D	NO!	MD	BHCL	MD.	NO.	ND I	×	סוג ס	ND:	MD	MD.	XD.	MD i
	EZY																										-

~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Date	Resc
blank space - not applicable		
indicates not sampled	12/22/06	33
ND - none detected	2/15/88	70

- none secret
- Trichloreethene
- trans-1,2,-Dichloroethene
- 1,1-Dichloroethene
- 1,2-Dichloropropane
- 1,1,-Trichloroethane
- Winyl Chloride

# Clarence Wilson & Sons Summary of Analytical Data for Domestic Well and Carbon System All concentrations ug/l, parts per billion, ppb. Analyses by EFA methods 601 and 602, CR 624 (indicated by \*). samples refer to between primary and secondary tanks, left hand train as you face the system. samples refer to between primary and secondary tanks, right hand train as you face the system. RB - indicates first sampling performed following rebedding

				:	RAN Sample	Tap			1	MID Sample		MID Sample		!			FTER Lample		18			1
Sampling Data	Total Callons	Α.	5	c	Ď			a	Н 1	A	3	Α.	•		Α.	•	_ c	D	i	7	•	H
8/13/85		130	130	3	7	MD	MD	ND	ŒΚ	***	כת	-		360		<u></u>			-			
11/22/85 12/13/85	2250 8673									מא מא	XD I	ND EN	CK GK	XDI	OK :	כווג פווג	OM COK	QK QK	AD CK	ND KD	ND CK	) CK
1/27/86	26689 77683									OK CH	1 ( ) (2)	פא מא	KD KD	ND I	EK CK	XD	MD.	Σ	XD	10	ND	ND!
\$/21/86° 8/21/86°	117840	100 130	100	PAD!	BMOL	TOME	JOE JOE	andr Tore	RDI		BADL	BOL		ומא ומא	100 100	ND ND	סא מא	)(D	ND ND	ND OX	ND ND	) CDI
11/20/864	154986	110	140			MB	XD	ND.	XD		XD (		BADL		ND.	XD	ND.	ND.	10	M	XD	ND (
2/16/87° B 3/02/87°	188274 193600	120	140	DOL	ROL	KD	ND.			KD KD	20 ( 30)	120	130 MD	ND:		10	AD CK	XD	)(D)	ND.	ND.	100
\$/ 4/87*	217400	110	120	10	BADL	10	ND.	XD	ND.	100	100	100			ND.	10	10	103	100	373)	XD	ND i
7/27/87° 10/20/87°	247880 274410	180	210 180	MOL	NOL	XD CX	X3)	10 10	ND (		MOL		MOL	NO)	12) 12)	10 10	)(D)	XD XD	10	XD (XI	ND ND	ND!
1/11/88*	302186	30	120	100	BOL	XD	KD	MD	) XD	10	30	MD.	DOL	ND (	300	KD	KD	- 100	110	ND.	XD	XD I
1/29/88° 4/6/88°	309020 333680	120	140	MD	MOL	XD	XD.	ND	ND:	XD	ו מא ו מא	NOT NO	ענונ מאנ	ן כדונ ן כדונ	XD	KD	)(D)	ND	XD.	XD	ND.	MD!

XEY	Rebed	Gallon
blank space - not applicable	Date	Reading
indicates not sampled ND - none detected A - Trichlorosthene	3/ 2/67	193470 307600
B - trans-1.2Dichlercethene	2,00,00	
C - 1.1-Dichlorosthens		
D - 1,1,1,-Trichloroethane		
E - Chloromethane		
F - Bronomethane	_	
6 - Vinyl Chloride	_/	
H - Chioroethane	/ 4	
Isaus Date: 3/12/88 / Lau	suly	

AR300093

#### Summary of Analytical Data for Domestic Well and Carbon System All concentrations and harra may hillian, myb.

Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).

MID A samples refer to between primary and secondary tanks, left hand train as you face the system.

MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

RB — indicates the first sampling performed following rebedding.

RAW Sample Tap							MID A Sample Tap (1941)				MID B Sample Tap			AFTER CARBON Sample Tap											
	bapling Date	Total Gallon	- A		c	•	. E	- <u>-</u> -j	, .		- 6			ī		٠, -		C		-		`. •			
	6 12/65		610	660	10	ND	MD	CK	******							*									•
	10 14/65 11 14/65	2430	700 490	680 460	13 12	2	) ND	MD I	MD.	2	10	10	-			MD	100	MD	MD	MD	ND.	MD.	ND.	MD .	
	11/27/65	6355						(	1	2	MO	, KD	NO.	3	ND	MD	ND	MD	MD	KD	102	KD	ND)	ND	
	11 27/85	6365 6375							ND ND	NO NO	MD MD	MDI	MD	1	MO I	ND ND	)(D)	ND ND	MD MD	ND ND	MD MD	ND ND	ND ND	ND ND	
	12 06/85	8596							102	2	MD	MD (	1.	6	NO I	MD	MD	MD	100	MD	ND	)(D)	) TO	MD	
	12 13/85	9500 10650		***					MD MD	3	MD	- MD	2 ND	5 2	MD I	. MD	ND	ND CN	MD GM	NO CN	10	100 (D)	ND ND	ND CN	
	12/27/05	11830							HD.	ž	MD	, ID	MD	š	MDI	MD	NO.	MD	ME	MD	ND.	ND.	XD	MD	
	1/10/86	14001 15 <b>698</b>						!	XD.	3	10 10	100	1 100	2	MD (	MD MD	ND ND		NC NC	100	MD MD	100 100	ND ND	100 (01)	
	1/17/66	17186							i	i	ND.	: MD	MD	3	10	MD.	10	K	ID	10	ND.	100	#D	ND.	
	1 27/86	19467 21012		•••					ND 3	•	100	: MD (		4	MD	)KD	ND ND	100 100	ND ND	100	10	NC)	MD	ND ND	
	2/10/66	22320							i	i	2	- MD	ND.	š	NO.	10	ND.	10	ND	370	KD	, and	10	NO.	
	2/17/86	· 22920 25133							1 10	•	100 100	11	MD MD	4	100 E	10	100	10	100 100	MD	100	10	10	MD	
	2724/66 37 3/66	26536							10	i	ND.	10	- 1	ć	10	<b>ED</b>	20	MD.	MD.	MD	10	MD.	ND ND	ND .	
	3/10/86	28155							MD 3	5	100 100	100	300 300		30)	. 10	MD MD	MD:	ND ND	MD MD	NO NO	ND ND	MD MD	ND ND	. "
	3/17/86 3/24/86	32252							NO.	i	10	· 100	IID	• 3	MD	. 10	XD.	10	10	XD	ND.	ND.	ND	ND ND	
	3/31/66	33670							NO NO	•	ND ND	MD (	3	7	11 MDI	ND ND	MD MD	MD	ND ND	MD MD	10	100 . 100	10	MD .	
	4/ 7/86	35497 36950							3170	i	10	10	i	- 7	MD	10	KD	MD	KD	10	MD MD	10	ND ND	ND ND	
	4/21/86	38948			***				ND.		300	. 10	10	3	KD	MD.	NO.	MD.	ND.	10	MD.	MD.	ND.	MD .	
	4/28/86 5/12/86	42020 46837	***						J No	10	10	100	MD MD	3	MD I	ND ND	MD MD	ND ND	ND ND	10	MD MD	10	MD	ND ND	
	5/22/86*	49905	660	630	10	ND	MD	NO.	MD	BHOL	100	100	NO I	MOL	HD.	100	XD.	KD	KD	MD.	MD.	MD.	KD	ND :	
	6/ 3/86 6/16/86	52880 56573						****	ND 2	7	MD MD	, MD		- \$	MD (	100 200	MD MD	100 100	MD MD	100 100	MD MD	100	ND ND	KD .	
	7/86	62677							ī	10	KD	MD.	2	11	ND I	MD	ND	MD	KD	MD	KD	MD.	MD	MD	
	7/21/86 8/ 4/86	66553 70370							•	13	MCD MCD	10	2	•	MD I	MD CM	ND ND	ND ND	ND .	10 10	10	MD	ND ND	MD	
RB	4/25/86*	77550	710	690	10	ND	MD	MD	ND.	100	MD:	MD	MD	MD	MD	- 112	ND.	MD	MD	ND.	MD.	ND	XD	MD	
	2/10/87*	100400 117835	450 520	640 590		SMOL	MD	MD I		endl Endl	MD MD	10	ND I	MDL 10	MD I	MD MD	ND ND	ND ND	ND ND	)(D)	MD MD	ND ND	)(D	MD MD	
RB	3/ 2/87*	122650							MD.	100	IID.	ND.	20	30	MD I										
RB	1/27/87* 1/8/87*	126980	540	630	10	BMDL	MD	MD	MD MD	BHDL BHDL	ND :	100		MDL	MOI	XD.	BMDL	100	100	10	KD	10	KD	MD	
	1/27/67	167380	650	670	10	POL	KD	MD	MD	10	KD	10	BHDL	20	NO!	ND.	NOL	XD.	KD	KD	10	MD	ND.	MD	
RB	10/20/87*	173750 190790	710	780	20	BHDL	BHDL	BADLI		emol Emol	MD MD	10		MDL 10	NO I	100	BHOL	MD.	100	MD.	100	HD.	MD.	MD	
RB	11/04/87*	198340						1	ND	MD.	100	MD	MD.	ND	MD I										
	1/11/88*	221230 257780	560 500	580 600	16 MD	MD MD		I CIK		endl endl	MD MD	MD MD		NOT.	3673 E	MD MD	MD EMDL	ND ND	MD MD	ND ND	100 100	10	ND ND	MD	
ĺ	700/00	237760		-	80			#U				-			#D										
	<u> 4                                    </u>	*****		-					Rebed Date		allen eadin														
-	blank spac								8/21/		7600														
		cates not detected	. nand	brea					3/ 2/		12251														
		oroethene							3/26/	87	12861		Seconda										d		
		1,2,-Dict chloroet		e thene	3				8/17/	67	17325		r Aildiu	unit	. Inst	47760 3	nto t	ne se	COUGE	ry bo	31710	u.,			
									11/ 3/	67	19758	0			14										
	D - 1,2-D1																								
	D - 1,2-D1 E - 1,2-D1	chloropro	pane						4/ 6/	***	25716	•													
	D - 1,2-Di E - 1,2-Di F - Methyl G - Toluen	chloropro ene Chlor	pane ide								23,114														
	D - 1,2-Di E - 1,2-Di F - Methyl G - Toluen H - Tetrac	chloropro	pane ride me	ne /	<b>`</b> ~				ut.		23/14													:	

J. Mooney
Summary of Analytical Data for Domestic Well and Carbon System
All concentrations ug/1, parts per billion, ppb.
Analyses by EPA methods 601 and 602, OR 624 (indicated by \*).
MID A samples refer to between primary and secondary tanks, left hand train as you face the system.
MID B samples refer to between primary and secondary tanks, right hand train as you face the system.
RB - indicates first sampling performed following rebedding.

		:		UW .			MID Sample		AFTER Sample	CARBON
	Sampling Date	Total Gallons	λ		λ.	В ј	Α.	B	A	J
	12/27/85	4020	20	4 60	ND	1	ND	  6	מא	. מא
	1/ 3/86	9047			ND	ND	ND	MD	ND	ND
	1/27/86	21001			ND	11	ND	1	ND	ND
	2/19/86	32177			ND	2	ND	4 1	ND	ND
	3/ 3/86	37540	+		ND	21	ND	31	ND	ND
	3/10/86	40011			ND	2	ND	3	ND	ו כזא
	3/17/86	44019			ND	31	ND	3 j	ND	ND
	3/24/86	47482			ND	31	DI	31	MD	ן כמונ
	3/31/86	50666			MD	51	ND	13	ND	ND
	4/14/86	58074			ND	6	ND	71	ND	ND
	4/21/86	61673			ND	51	ND	71	ND.	ND 1
	4/28/86	65255		1	ND	41	ND	51	ND	ND
	5/ 5/86	70420		1	ND	<b>9</b> 1	ND	51	ND	ND I
	5/22/86*	78156	110	1200	ND	BMDL	ND	BMDLI	סא	MD (
	6/ 9/86				מא		MD	101	ND	ND
	6/30/86	94484		!	ND	11	ND	131	ND	ו מא
	7/14/86	100719			ND	171	ND	171	ND	ND I
	7/28/86	107363		!	ND	28 [	ND	151	ND	ND I
	8/11/86	113265		!	ND	21 [	ND	251	ND	ND I
RB	8/25/86*	120270	100	1800	ND	BMDLI	MD	BMDL	MD	ND I
	11/26/86*	159190	50	760	ND	101	ND	101	ИD	ו סא
K.5	12/23/86*	170110		===!	ИD	NDI	ND	NDI		
	2/18/87* 5/ 8/87*	194730 226030	50 80	660   1400	ND	BMDL	ND	BMDL:	ND ND	ND I
	7/27/87*	227540	160	2500	ND ND	301	ND ND	201		- ND   +1700
RB	8/17/87*	(1) 140	140	2300 I	ND	201	ND	BMDL	120-	-1700
RB	9/ 2/87*	6340			ND	BMDL1	ND	BMDL		
V.D	10/26/87*	24640	130	2100	ND	BMDL	ND	BMDL	ND	ו סא
	1/18/88*	42640	70	960	ND	10.1	ND	10	ND	BMDLI
RB	2/16/88*	214250			ND	NDI	ND	101		I
RB	3/9/88*	222960			ND	BMDL	ND	19		
RB	3/31/88*	232110					ND	BMDL	ND	NED I
	4/15/88*	236660	80	1200	ND	10	סא	BMDL	ND	ND I
	KEY						Rebed Date		allon eading	

KEY	Rebed Date	Gallon Reading
blank space - not applicable	DE CO	reservià
indicates not sampled	8/19/86	117800
ND - none detected	12/22/86	169600
** - results indicate an analytical	8/14/87	(1) 0
discrepancy from an undetermined	error.	• •
(1) - A new water meter was	9/ 1/87	5150
installed with 150980 gallons	2/15/88	213720
already recorded.	3/ 8/88	222360
A - Trichloroethene	3/30/88	231710
B - trans-1, 2, -Dichloroethene	سعيد ،	-

J. Effgen

Summary of Analytical Data for Domestic Well and Carbon System

All concentrations ug/l, parts per billion, ppb.

Analyses by EFA 601 and 602, OR 624 (indicated by °).

MID A samples refer to between primary and secondary tanks, left hand train as you face the system.

MID B samples refer to between primary and secondary tanks, right hand train as you face the system.

RB - indicates first sampling performed following rebedding.

ı									LTT.			MID R										
l			RAW	Samp.	ie Ta	Þ		ı	Sampl	le Taj	P 1	Samp!	le Tap	- 1		AFTE	R CAR	BCN S	ample	Tap	- 1	
l	Sampling	Total		· <u>-</u>		· •_ •		!		- :	!	•	• - •	· -!			-			· -	1	
	Date	Gallons	A,	B	C	D	E	F !			F 1	A	- В	!	λ	В	C	Ð	E	F	į	
	8/23/85		560	680	15	ND		MDI						!				*****			!	
		400	260	900	13				ND	ND	NDI	ND	•	- 1	ND	2	ND	ND	ND	•	. !	
i	11/22/85							!				20		!								
ı	1/17/86	9814							2	6	NDI	- 2	ND	Į.	ND	ND	ND	ND	ND			
	5/27/86*	30172	660	700				MD	· ND		ND	ND	10	ı	ND	ND	ND	ND	ND	NO		
ı	8/20/86*		630	680	10	BMDL	MD	ND	ND	BMDL	ND	BMDL	10	- 1	ND	ND	ND	ND	ND	BHDL		
	11/26/86*	60020	710	800	10	BMDL	, XD	MD	BMDL	20	MD	10	30	1	· ND	MD	ND	MD	ND	MD	ĺ	
RB	12/23/86*	64532							ND	ND	MD	ND	MD	Ĺ							ĺ	
	2/16/87*	72841	400	540	10	EMDL	100	MD	ND	BHDL	MD	ND	BADL	. [	MD.	KD	ND	MD.	ND	100	ì	
,	5/ 4/87*	85243	610	700	10	BMDL	) MD	IDI	ND	BMDL	MD	ND	BMDL	j	MD	ND	ND	MD	ND	MD	i	
ŀ	7/27/87*	105220	650	690		BMDL		KDI		BMDL	MDi	BMDL	10	i	ND	ND	ND	MD	ND	MD		
RB		110375								BMDL	ND	ND	NTD	i								
~	10/20/87*	122520	650	750	20	BMDL	BMDL	жDi	ND	ND	NDI	ND	KD	i	ND	KD	ND	ND	ND	NO.		
									ND		BMDL	ND	MD		KD	ND	ND ND	MD	ND			
i	1/11/88*	134440	560	720		BMDL		KD						. !						MD		
ŀ	4/07/88*	147280	590	680	BMDL			MD	MD		NDI	_ ND	MD	- 1	MD	MD	ND	<b>3</b> (D)	KD	MD		
E	KEY						Rebed		Gallo			-								•		
						:	Date		Readi	ng												
	blank space	a - not app	licabl	.e																		
	indi	cates not sa	mpled	t			12/22/	/86	6424	3												
ı	MD - none			-			8/13/		11033	0												
	20 11/11# (									-												

lank space - not applicable
-- indicates not sampled
D - none datected
- Trichloroethene
- trans-1,2,-Dichloroethene
- 1,1-Dichloroethene
- 1,2-Dichloroethane
- 1,2-Dichloropropane
- Methylene Chloride

Date:

APPENDIX B



## UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION III

841 Chestnut Building Philadelphia, Pennsylvania 19107

RESPONSIVENESS SUMMARY FOR THE
PROPOSED REMEDIAL ACTION PLAN
AT THE KIMBERTON SUPERFUND SITE
EAST PIKELAND TOWNSHIP, CHESTER COUNTY
PENNSYLVANIA

September 30, 1988

# RESPONSIVENESS SUMMARY FOR THE PROPOSED REMEDIAL ACTION PLAN AT THE KIMBERTON SUPERFUND SITE EAST PIKELAND TOWNSHIP, CHESTER COUNTY PENNSYLVANIA

#### Table of Contents

- I. Introduction
- II. Summary of Community Relations Activities
- III. Written Comments
- Attachment I. Proposed Remedial Action Plan for the Kimberton Superfund Site

CIBA-GEIGY

#### I. Introduction

The Kimberton site occupies approximately one acre and is located in the northeastern portion of Chester County in the Village of Kimberton. Domestic and commercial well water samples have detected high levels of chlorinated hydrocarbon chemical contamination. A source of this contamination has been identified as the property currently owned by the Monsey Corporation which contained several buried lagoons that were operated by Ceiba Geigy Corporation during the 1950's. An investigation of the site and further sampling studies have revealed the presence of assorted volatile organic compounds. The Kimberton site was added to the Superrund National Priorities List (NPL) in 1982.

#### II. Summary of Community Relations Activities

A number of public meetings were conducted during 1981-82 by the Pennsylvania Department of Environmental Resources and EPA to discuss the results of preliminary water sampling and the possible cleanup actions that may be taken. In cooperation with PADER, Ceiba-Geigy and Monsey Products, Inc. conducted additional public meetings and provided briefings to local officials to inform them of the site investigation results. In 1985, both companies established interim water supplies for 23 families and also provided carbon absorption systems. In August of 1988, PADER and EPA notified area residents that the Proposed Remedial Action Plan was available for review/comment by placing an advertisement in the August 26, 1988 edition of the Chester County Daily Local News. In addition, the proposed plan was mailed to all citizens in the area whose names were on the site mailing list. A public meeting to discuss the Proposed Remedial Action Plan was also offered to area requests. However, requests for such a meeting were never received.

#### III. Written Comments

Neither PADER nor EPA received written comments on the Proposed Remedial Action Plan for the Kimberton Superfund Site.

# Rimberton Superfund Site Proposed Remedial Action Plan Presented by Pennsylvania Department of Environmental Resources and the United States Environmental Protection Agency

#### INTRODUCTION

This proposed remedial action plan has been prepared by the Pennsylvania Department of Environmental Resources (PADER) and the United States Environmental Protection Agency (EPA) as part of PADER and EPA's Superfund public outreach efforts. This proposed plan presents actions that PADER and EPA have considered with regard to public concern related to the Kimberton Site in the Village of Kimberton, Chester County, Pennsylvania. These actions were identified by several Remedial Investigation reports and were evaluated based on: 1) the extent of the contamination problem at the site, 2) the potential risks to the public health and the environment and 3) the steps to be taken to correct the problem. This proposed plan is the first of two operable units for this site. The first unit, the subject of this proposed plan, deals with selection of a remedy that provides a drinking water source for certain locations. The second alternative operable unit is focusing on elimination/control of this contamination source.

The proposed plan begins with a brief history of the Rimberton site, followed by a summary of each of the remedial alternatives PADER and EPA have considered for dealing with the groundwater contamination at this site, PADER's and EPA's rationals for recommending and, in some cases eliminating any one of these remedial alternatives is included in each of the summaries. In addition, this plan identifies the preliminary decision on a preferred alternative and explains the rationals for the preference. EPA and PADER are seeking public comment on these remedial alternatives currently under consideration. At the conclusion of this proposed plan, a glossary of terms that may be unfamiliar to the general public is provided.


#### SITE DESCRIPTION AND HISTORY

The Village of Kimberton is located in the northeastern portion of Chester County, Pennsylvania near the Philadelphia metropolitan area. Numerous domestic and commercial potable well water supplies have been sampled by the Chester County Health Department and analyzed by PADER since January 1982. High levels of chlorinated hydrocarbon chemical contamination has been detected in many of the sampled wells. A source of this contamination has been identified as the property currently owned by the Monsey Corporation which contained several buried lagoons that were operated by the Ciba-Geigy Corporation during the 1950's (see figure 1).

Three of these lagoons have been excavated with contaminated soils being removed off-site. The lagoons are in close proximity to numerous private water supply wells and less than one mile from French Creek which is used for public recreation and fishing. Ciba-Geigy sampled 67 residential and commercial establishments in August 1, 1985 and found in some of these wells various concentrations of trichloroethylene (TCE), 1,2-dichloroethylene (DCE) and

vinyl chloride (VC) which are all considered hazardous substances according to the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA). Ciba Geigy and Monsey signed a Consent Order and Agreement with PADER to provide certain residential and commercial locations with an alternative source of drinking and contact water in December 1986. Ciba Geigy and Monsey in addition continue to monitor these and other designated locations periodically according to a prescribed sampling and analytical procedures outlined under the terms of this Consent Order.

This site was evaluated through the Hazard Ranking System (HRS) and subsequently placed on the National Priorities List (NPL) a list of hazardous waste sites targeted for action under the Superfund program, in 1982.

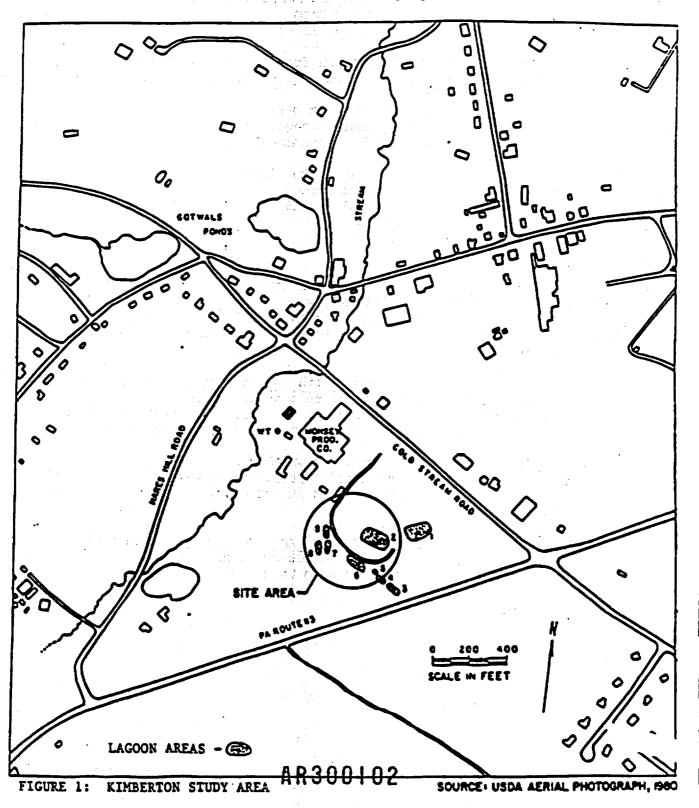

#### COMMUNITY ROLE IN THE SELECTION PROCESS

This proposed plan is being distributed to solicit public comment regarding the proposed remedial alternatives to clean up the contamination at this site. Detailed information on all of the material discussed here may be found in the the documents contained in the Administrative Record (AR) for the site. Copies of these documents are available for review at the following information repository location:

The East Pikeland Township Municipal Building Rapps Dam Road Kimberton, PA 19442

The public comment period will run from August 25, 1988 to September 23, 1988. Written comments, questions and requests for information can be sent to:

Gene Pine, Project Officer Bureau of Waste Management PA Dept. of Environmental Resources Fulton Building, 7th Floor 3rd and Locust Streets Harrisburg, PA 17129 717-783-7816

#### EVALUATION CRITERIA

With PADER oversight, Ciba Geigy and Monsey are currently conducting a Remedial Investigation/Feasibility Study (RI/FS) of the site which began in 1985 and is anticipated to be completed in late 1988. Several alternatives addressing water supply have been evaluated against the following nine evaluation criteria:

- Overall protection of human health and the environment addressing whether
  or not a remedy provides adequate protection and describes how risks posed
  through each pathway are eliminated, reduced or controlled through
  treatment, engineering controls, or institutional controls.
- Compliance with ARARs addressing whether or not a remedy will meet all of the applicable or relevant and appropriate requirements of other Federal and State environmental statutes and/or provides grounds for invoking a waiver.
- Long-term effectiveness and permanence referring to the ability of a remedy to maintain reliable protection of human health and the environment over time once cleanup goals have been met.

- Reduction of toxicity, mobility or volume is the anticipated performance of the treatment technologies a remedy may employ.

100

- Short-term effectiveness addresses the period of time needed to achieve protection, and any adverse impacts on human health and the environment that may be posed during the construction and implementation period until cleanup goals are achieved.
- Implementability is the technical and administrative feasibility of a remedy, including the availability of materials and services needed to implement a particular option.
- Cost includes estimated capital and operation and maintenance costs and net present worth costs.
- State Acceptance indicates whether, based on its review of RI/FS and Proposed Plan, the State concurs on, opposes, or has no comment on the preferred alternative at the present time.
- Community Acceptance will be assessed in the Record of Decision following a review of the public comments received on the Administrative Record and Proposed Plan.

#### SUMMARY OF REMEDIAL ALTERNATIVES

The Center for Disease Control (CDC) has previously reviewed the initial sampling data collected by Ciba-Geigy in August 1985 which included 67 residential and commercial establishments. CDC at that time certified 12 wells as being unfit for human consumption and also supported alternative water supplies and additional monitoring which had already been initiated by PADER. The Remedial Investigation is continuing to fully identify the contaminant source(s) as well as the full extent of groundwater contamination and will be addressed in a subsequent Proposed Remedial Action Plan.

Three alternatives were specifically developed to address the health risk to those residents who may continue to utilize contaminated private wells. These alternatives were identified and evaluated according to specific criteria required by CERCLA.

#### ALTERNATIVE 1: NO FURTHER ACTION

Under this alternative, residential and commercial establishments having contaminated wells would continue to receive treatment on an individual basis by filtration utilizing granular activated carbon adsorption. A groundwater monitoring program would also continue which allows periodic reassessment of the extent of contamination and the concentrations of hazardous substances contained in the groundwater. Both treatment and monitoring are being performed by Ciba-Geigy and Monsey in accordance with Consent Order with PADER. Based upon a review of current groundwater data, this technology has served to reduce to non-detectable levels the hazardous substances found in the groundwater obtained from contaminated wells.

Estimated Construction costs: 0
Estimated Annual O&M costs: \$250,000 - 300,000
Estimated Implementation timeframe: 2-30 years

A human health evaluation was performed and it was determined in several instances, trichloroethylene, dichloroethylene and vinyl chloride exceed acceptable concentration levels. Human exposure to these contaminants in groundwater may lead to adverse health effects. Therefore, this alternative is appropriate because it would be protective of human health and the environment. This is an interim remedy and will be reevaluated once the full extent of the groundwater contamination has been defined and the source remediation alternatives have been evaluated.

#### ALTERNATIVE 2: TEMPORARY DRINKING WATER

The use of a temporary drinking water source for potable water (i.e. bottled water) is a potential alternative to be implemented until such time that a permanent alternative water supply can be provided for the residents and commercial establishments or the contaminant plume has been remediated. A range of two to thirty years has been estimated as the length of time that residents and commercial establishments will need to use a temporary drinking water sources.

Bottled water can be supplied through delivery to each of the 23 affected locations. The average daily demand for each residence was established for drinking and cooking purposes only. Temporary supply to meet all domestic water needs is impractical since a majority of bottled-water vendors supply five or six gallon storage containers mounted on a free-standing dispenser (i.e., bulk storage and dispensing facilities for purchased water would be required for each residence). Therefore, under Alternative 2, all other domestic water needs (i.e., sanitary, bathing, washing, etc.) would continue to be met through the existing contaminated well supplies.

The provision of a temporary water supply to meet drinking and cooking needs would reduce health risks resulting from the ingestion of contaminated well water. However, risks associated with airborne and dermal exposure would continue. The magnitude of the health risk from inhalation and dermal absorption is expected to be comparatively small for a two-year implementation period and would increase proportionately with increased time of exposure.

Estimated Construction Cost: - 0 Estimated Annual O&M \$130,999
Estimated Timeframe: 2-30 years

## ALTERNATIVE 3: WATER COMPANY SERVICE CONNECTIONS AND WATER-MAIN EXTENSION (PUBLIC WATER SUPPLY)

Both the Phoenixville System and Citizens Utility currently supply water to a portion of the residences in the Kimberton area.

The both Company's existing water distribution systems do not currently extend to the area in which the contaminated wells are located. Addressing the problem of the contaminated residential wells by replacement with a public water supply would require the extension of the water supply service system(s).

The facilities to extend the water system(s) include approximately 8,000 feet of water main and 23 service connections. The location of water mains and appurtenances for the water service would be finalized during the design phase.

The implementation of this alternative would necessitate abandonment and sealing of the individual residential wells in accordance with the PADER Standard Specifications for Sealing of Abandoned Wells.

Extension of the existing system is a technically feasible and implementable, however, some members of the community prefer to continue using their own private wells containing the carbon filter systems. The capital cost for expanding the water company system(s) is estimated at \$1,300,000. The physical expansion of these facilities could be implemented in six to nine months including design, approval, and construction of the system. Six additional months are necessary for administrative purposes, such as securing contracts.

Implementation of this alternative would completely eliminate risk due to exposure to contaminated ground water of residents using the contaminated groundwater for drinking and contact water, It is a viable alternative and represents a permanent solution for providing a drinking water source that meets all criteria for the protection of human health.

Estimated Construction Cost: \$1,300,000 Estimated Annual O&M: - 0 -Estimated Timeframe: 1-2 years

#### PRELIMINARY DETERMINATION OF PREFERRED REMEDIAL ALTERNATIVE

The preferred alternative is alternative number 1. This alternative selects continued use of individual well treatment by granular activated carbon adsorption as per PADER's Consent Order. Based on new information or public comments, EPA, in consultation with PADER, may modify the preferred alternative or select another response action presented in this plan. The public, therefore, is encouraged to review and comment on all of the alternatives identified in this Proposed Plan. The Administrative Record should be consulted for more information on these alternatives.

This alternative provides complete protection, in the short-term, to the groundwater users by treatment of the water at the individual wells. Long-term effectiveness will be obtained by implementing additional alternatives identified in the next operable unit which will be available for public comment once developed.

EPA, in consultation with PADER, has made a preliminary determination that the preferred alternative provides the best balance of trade-off with respect to the nine criteria. If selected, the preferred alternative is anticipated to meet the following statutory requirements to:

- Protect human health and the environment
- Attain ARARS
- Be cost-effective
- Utilize permanent solutions and alternative treatment (or resource recovery) technologies to the maximum extent practicable

#### SUMMARIZING THE STATUTORY FINDINGS

In summary, at this time the preferred alternative is believed to provide the best balance of trade-offs among alternatives with respect to the criteria used to evaluate remedies. Based on the information available at this time, therefore, EPA and PADER believe the preferred alternative would be protective, would attain ARARS, would be cost-effective, and would utilize permanent solutions and alternative treatment technologies or resource recovery technologies to the maximum extent practicable.

#### NEXT STEPS

Following the conclusion of the 30-day public comment period on this proposed remedy, a Responsiveness Summary will be prepared. The Responsiveness Summary summarizes citizen's comments on the proposed remedy and PADER and EPA's responses to these comments. Thereafter, PADER and EPA will prepare a formal decision document that summarizes the decision process and the selected remedy. This document will include the Responsiveness Summary. Copies will be made available, for public review, in the information repository listed previously.

#### GLOSSARY OF TERMS

Administrative Record (AR) - A legal document that contains information on a Superfund site. The AR serves as the basis for the selection of a Superfund response action, and this record is available to the public.

<u>ARARS</u> - Applicable or relevant and appropriate Federal, State or other promulgated public health and environmental requirement.

CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act established a Trust Fund for the purposes of cleanup at hazardous waste sites identified on the National Priority List.

Feasibility Study (FS) - The purpose of this study is to identify and screen cleanup alternatives for remedial action, and to analyze in detail the technology and costs involved with the various alternatives.

<u>National Contingency Plan (NCP)</u> - Contains the regulations that govern the Superfund program.

<u>National Priorities List (NPL)</u> - EPA's list of the nation's top priority hazardous waste sites that are eligible to receive federal money for response under superfund.

Remedial Design - An engineering phase that follows the Record of Decision when technical drawings and specifications are developed for the subsequent remedial action at a site on the National Priorities List (NPL).

Remedial Investigation (RI) - The purpose of this study is to gather the data necessary to determine the type and extent of contamination at a Superfund site.

Superfund - The common name used for the Comprehensive Environmental Response, Compensation, and Liability Act, also referred as the Trust fund. The Superfund program was established to help pay for cleanup of hazardous waste sites and to take legal action to force those responsible for the sites to clean them up.

APPENDIX C

# KIMBERTON SITE ADMINISTRATIVE RECORD \* \*\* INDEX OF DOCUMENTS

## SITE IDENTIFICATION Preliminary Assessment and Site Inspection Reports

- 1) Site Inspection Report, 6/23/82. P. 1-10.
- 2) Report: Hazard Ranking System Model of Kimberton, TDD No. F3-8206-10, EPA No. PA-423, prepared by Mr. David A. Nickerson, Ecology and Environment, Inc. 7/23/82. P. 11-40.
- 3) Report: A Site Inspection of Kimberton, TDD No. F3-8203-22, EPA No. PA-423, prepared by Mr. Gregg Crystall, Ecology and Environment, Inc., and Mr. Joseph G. McGovern, Ecology and Environment, Inc., 7/23/82. P. 41-167.
- 4) Report: A Toxicological Impact Assessment of Kimberton TCE Lagoons,

  TDD No. F3-8203-22A, EPA No. PA-423, prepared by Mr. Gregg Crystall, Ecology
  and Environment, Inc., Mr. Kenneth G. Symms, Ecology and Environment, Inc.,
  and Mr. Joseph G. McGovern, Ecology and Environment, Inc., 8/31/82. P. 168-288.

- \* Administrative Record available 8/15/88.
- \*\* Supporting Sampling Data is stored at the Region III Central Regional Laboratory.

## REMEDIAL ENFORCEMENT PLANNING Signed Order

- 1) Letter to Mr. Bradford F. Whitman, Dechert, Price and Rhoads, from Ms. Melinda J. Holland, Pennsylvania Department of Environmental Resources, re: transmittal of signed Consent Orders, 12/19/86. P. 1-53. The Consent Orders are attached.
- 2) Letter to Mr. Bradford F. Whitman, Dechert, Price and Rhoads, from Mr. Douglas F. Brennan, Pennsylvania Department of Environmental Resources, re: transmittal of final Consent Order and Agreement, 7/9/87. P. 54-83. The Second Consent Order and Agreement is attached.
- 3) Letter to Mr. Bradford F. Whitman, Dechert, Price and Rhoads, and Mr. Benjamin G. Stonelake, Blank, Rome, Comisky and McCauley, re: negotiating the proposed Consent Agreement and Consent Order, 9/30/87. P. 84-85.

### REMEDIAL RESPONSE PLANNING Remedial Investigation Reports

- 1) Report: Hydrogeological Assessment on Groundwater Conditions in Kimberton, Pennsylvania, prepared by Mr. Paul M. Yaniga, Groundwater Technology, Inc., and Mr. William Smith, Groundwater Technology, Inc., 1/31/83. P. 1-107.
- 2) Report: Remedial Action Plan, Excavation of Lagoons 5,7, and 9 at Monsey Products Company, Kimberton, Pennsylvania, prepared by Groundwater Technology, Inc., 9/14/84. P. 108-125.
- 3) Report: Revised Groundwater Monitoring Program, Kimberton, Pennsylvania, (Previous Submission 17 May 1983), prepared by Mr. Frank Aceto, Groundwater Technology, Inc., and Mr. Raymond Duchaine, Environmental Resources Management, 1 2/26/85. P. 126-153.
- 4) Report: Revised Groundwater Monitoring Program, Kimberton, Pennsylvania, (Previous Submission 17 May 1983), prepared by Mr. Frank Aceto, Groundwater Technology, Inc., and Mr. Raymond Duchaine, Environmental Resources Management, Inc., 2/28/85. P. 154-168.
- 5) Report: Addendum to Remedial Action Program of 4 February 1985, Excavation of Lagoons 6,7, and 9 at Monsey Products Company, Kimberton, Pennsylvania, prepared by Groundwater Technology, Inc., 4/3/85. P. 169-457.
- 6) Report: Interim Status Report, Groundwater Monitoring Program, Kimberton, Pennsylvania, prepared by Mr. Frank Aceto, Groundwater Technology, Inc., and Mr. Mark J. Wrigley, Groundwater Technology, Inc., 12/23/85. P. 458-694.
- 7) Report: Report of Findings, Groundwater Monitoring Programs, Kimberton,
  Pennsylvania, prepared by Mr. Frank Aceto, Groundwater Technology, Inc.,
  and Mr. Mark J. Wrigley, Groundwater Technology, Inc., 10/16/86. P. 695-1034.
- 8) Report: Work Plan For Completion of The Remedial Investigation and Feasibility Study, Kimberton, Pennsylvania, prepared by Environmental Resources Management, Inc., and Groundwater Technology, Inc., 7/87. P. 1035-1385

#### Correspondence and Supporting Documentation

- 1) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the Data Review Packages, 6/22/87. P. 1-9. The Data Review Packages are attached.
- 2) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary which includes the results of GAC system sampling, 7/20/87. P. 10-11. The computer summary is attached.
- 3) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results from the GAC system sampling, 8/17/87. P. 12-13. The computer summary is attached.


- 4) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results obtained from the quarterly sampling, 8/17/87. P. 14-39. The computer summary is attached.
- 5) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the remaining analytical summaries and QA/QC packages for the quarterly sampling, 9/11/87. P. 40-63. The analytical summaries and QA/QC packages are attached.
- 6) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary which includes the latest results from the GAC system sampling, 9/21/87. P. 64-65. The computer summary is attached.
- 7) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results obtained from the J. Mooney residence and ERM's Data Package Review, 9/21/87. P. 66-69. The computer summary and the Data Package Review are attached.
- 8) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results obtained from the October 1987 quarterly sampling of the GAC systems, 11/20/87. P. 70-96. The computer summary is attached.
- 9) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results obtained from the January 1988 quarterly sampling of the GAC systems, 2/29/88. P. 97-132. The computer summary is attached.
- 10) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the January 1988 quarterly sampling QA/QC Data Review Package and the January-February 1988 Rebedding Data Package, 3/21/88. P. 133-142. The QA/QC Review Package and the Rebedding Data Package are attached.
- 11) Letter to Mr. Bugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary which includes the results of the GAC system sampling, 5/19/88. P. 143-145. The computer summary is attached.
- 12) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary of the analytical results obtained from the April 1988 quarterly sampling of the GAC systems, 5/19/88. P. 146-172. The computer summary is attached.

- 13) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the computer summary which includes the May 17 and 18 results of GAC system sampling 6/13/88. P. 173-175. The computer summary is attached
- 14) Letter to Mr. Eugene W. Pine, Pennsylvania Department of Environmental Resources, from Mr. J. Stewart Johnson, CIBA-GEIGY, re: transmittal of the April 1988 quarterly sampling QA/QC Data Review Package, 6/20/88. P. 176-189. The QA/QC Data Review Package is attached.

#### GENERAL GUIDANCE DOCUMENTS \*

- 1) "Promulgation of Sites from Updates 1-4," Federal Register, dated 6/10/86.
- 2) "Proposal of Update 4," Federal Register, dated 9/18/85.
- 3) Memorandum to U. S. EPA from Mr. Gene Lucero regarding community relations at Superfund Enforcement sites, dated 8/28/85.
- 4) Groundwater Contamination and Protection, undated by Mr. Donald V. Feliciano on 8/28/85.
- 5) Memorandum to Toxic Waste Management Division Directors Regions I-X from Mr. William Hedeman and Mr. Gene Lucero re: Policy on Floodplains and Wetlands Assessments for CERCLA Actions, 8/6/85.
- 6) Guidance on Remedial Investigations under CERCLA, dated 6/85.
- 7) Guidance on Fessibility Studies under CERCLA, dated 6/85.
- 8) "Proposal of Update 3," Federal Register, dated 4/10/85.
- 9) Memorandum to Mr. Jack McGraw entitled "Community Relations Activities at Superfund Sites Interim Guidance," dated 3/22/85.
- 10) "Proposal of Update 2," Federal Register, dated 10/15/84
- 11) EPA Groundwater Protection Strategy, dated 9/84.
- 12) Memorandum to U.S. EPA from Mr. William Heckman, Jr. entitled "Transmittal at Superfund Removal Procedures Revision 2," dated 8/20/84.
- 13) "Proposal of Update 1," Federal Register, dated 9/8/83.
- 14) Community Relations in Superfund: A Handbook (interim version), dated 9/83.
- 15) "Proposal of First National Priority List," Federal Register, dated 12/30/82.
- 16) "Expanded Bligibility List," Federal Register, dated 7/23/82.
- 17) "Interim Priorities List," Federal Register, dated 10/23/81.
- 18) Uncontrolled Hazardous Waste Site Ranking System: A User's Manual (undated).
- 19) Field Standard Operating Procedures Air Surveillance (undated).
- 20) Field Standard Operating Procedures Site Safety Plan (undated).

<sup>\*</sup> Located in EPA Region III office.

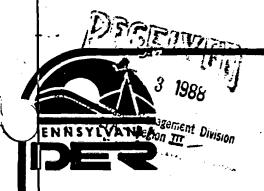

## COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL RESOURCES

Post Office Box 2063 Harrisburg, Pennsylvania 17120

September 29, 1988

Deputy Secretary for Environmental Protection

(717) 787-5028

Stephen R. Wassersug, Director Hazardous Waste Management Division EPA Region III 841 Chestnut Building Philadelphia, PA 19107

Re: Letter of Concurrence Kimberton Superfund Site, Record Of Decision (ROD)

Dear Mr. Wassersug:

The Record Of Decision for the first operable unit at the Kimberton site has been reviewed by the Department. We agree that the actions already being implemented by the responsible party, pursuant to the existing consent order with the Department, meets all necessary requirements for this operable unit. I hereby concur with the EPA's proposed remedy, with the following conditions:

- \* The Department will reserve our right and responsibility to take independent enforcement actions pursuant to state law.
- \* This concurrence with the selected remedial action is not intended to provide any assurances pursuant to SARA Section 104(c)(3).

Thank you for the opportunity to concur with this EPA Record Of Decision. If you have any questions regarding this matter please do not hesitate to contact me.

Sincerely,

Mark M. McClellan